



Long-lasting and low maintenance, LED-based light sources are an excellent solution for all lighting applications. For optimal performance, these solutions require reliable drivers matching the long lifetime of the LEDs. **The Advance Xitanium LED outdoor driver portfolio** offers a range of products specially designed to operate LED solutions in outdoor applications. These drivers are designed for hard-wired integration into outdoor luminaires for rugged applications. They operate to specification under wide temperature and electrical ranges to ensure reliability.


Specifications

| Input Voltage (Vrms) | Output Power (W) | Output Voltage (V) | Output Current (A) | Efficiency@ Max. Load and 70°C Case | Max. Case Temp. (°C) | Input Current (Arms) | Max. Input Power (W) | THD @ Max. Load | Power Factor @ Max. Load | Surge Protection Common/ Diff (KV) | Envir. Protection Rating |
|----------------------|------------------|--------------------|--------------------|-------------------------------------|----------------------|----------------------|----------------------|-----------------|--------------------------|------------------------------------|--------------------------|
| 347 | 150 | 42-142 | 1.05 | 91.5 | 80 | 0.50 | 164 | <10% | >0.95 | 6 | UL damp & dry, Type HL |
| 480 | | | | 92.5 | | 0.35 | | | | | |


Enclosure

| | In. (mm) |
|-----------------|--------------|
| Case Length | 8.31 (211.1) |
| Case Width | 2.31 (58.6) |
| Case Height | 1.48 (37.6) |
| Mounting Length | 8.91 (226.3) |
| Overall Length | 9.47 (240.5) |

Wiring Diagram

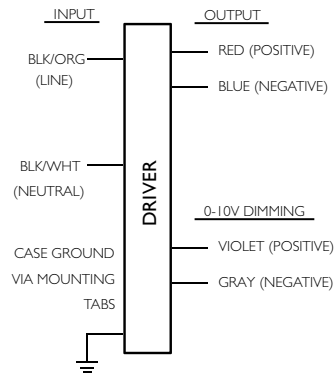

| Dimming | Dimming Range | Minimum Output Current (A) |
|-----------------------------------|---------------|----------------------------|
| 0-10V Analog Class 1 and 2 Wiring | 10% ~ 100% | 0.105 |

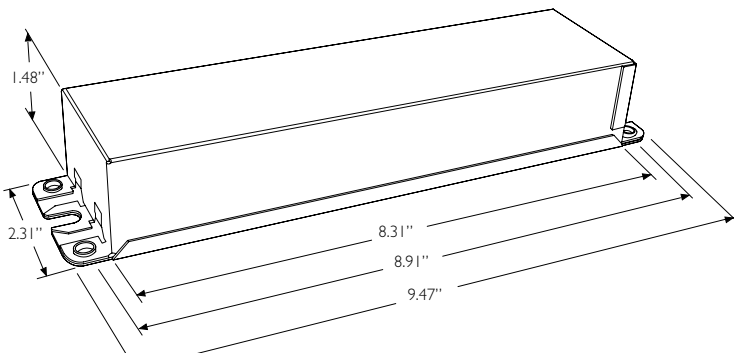

Xitanium XH150C105V140CNF1

150W 347-480V 1.05A 0-10V

Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.

Features

- 50,000+ hour lifetime¹
- Excellent thermal performance
- 6kV combi-wave surge rating to comply with ANSI C82.77-5 CAT C low

Benefits

- Enables long life luminaire designs
- Allows luminaire designs for ambient environments
- No external surge protection required to pass C82.77-5 CAT C low

Application

- Area
- Roadway
- Parking garages
- Floodlights

Product Data

| Order Information | |
|--|--|
| Full Product Code | XH150C105V140CNF1M (Mid-Pack, 10pcs/Box) |
| Line Frequency | 50/60Hz |
| Min. Mains Voltage Operational | 312V |
| Max. Mains Voltage Operational | 528V |
| Output Information | |
| Maximum Open Circuit Voltage | 210Vdc |
| Output Current Ripple (ripple = peak to average / average) | 15% max. @ max. Iout and max. Vout Low frequency (≤ 120 Hz) content <5% |
| Output Current Tolerance (at maximum output current) | <5% |
| Protections | Short Circuit and Open Circuit Protection for LED + and LED – and Temperature Foldback |
| Operating Ambient Temp. Range | -40°C to +55°C |
| Max. Case Temperature (Tcase) | 80°C |
| Features | |
| 0-10V Dimming Specifications | 150 μ A \pm 3% source current from driver. See dim curve for detail. |
| Environment & Approbation | |
| Agency Approbations | UL 8750, CSA 250.13 |
| Electromagnetic Compliance | FCC Title 47 Part 15 Class A |
| Audible Noise | <24dB Class A |
| Weight | 1.98Lbs/ 0.90Kgs |

¹ Advance Xitanium LED Drivers are designed and manufactured to engineering standards correlating to an average life expectancy of 50,000 hours of operation at maximum rated case temperature. Minimum 90% survivals based on MTTF modeling.

Xitanium XH150C105V140CNF1


150W 347-480V 1.05A 0-10V

Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.

Driver Current Cutback

The Driver Current Cutback feature provides for an increased output voltage with a reduced output current during abnormal LED operation, such as cold weather starting.

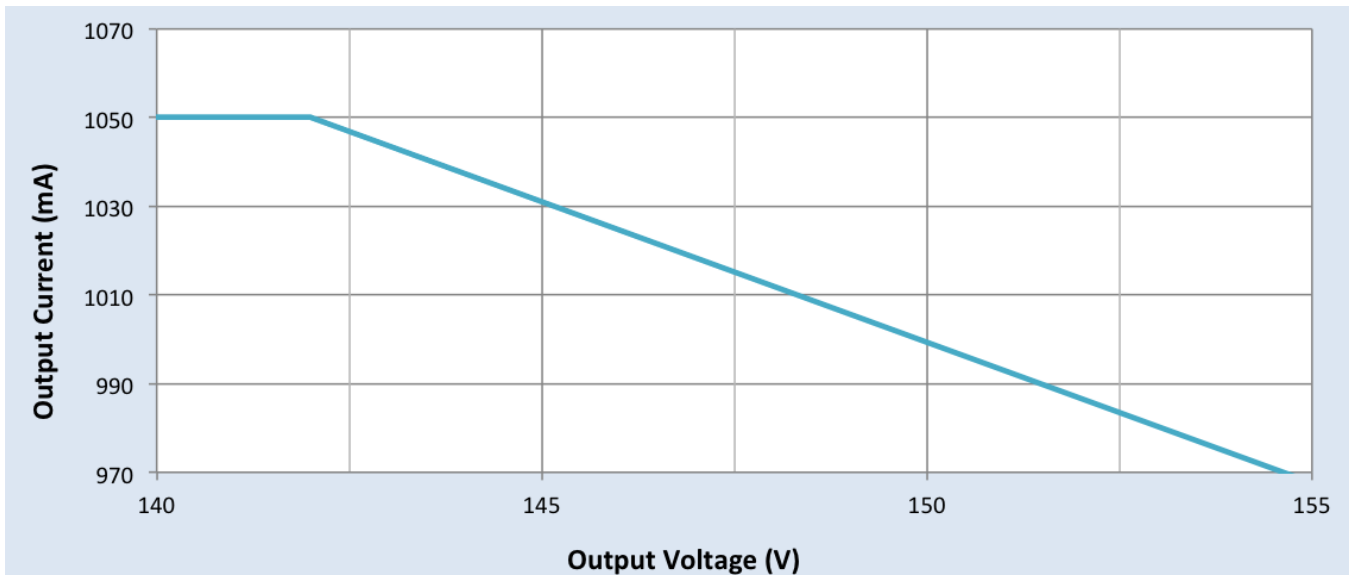

Xitanium XH150C105V140CNF1

150W 347-480V 1.05A 0-10V

Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.

0-10V Dimming Curve


Dimming source current from the driver: 150µA (@ 0<Vdim<8V)

Minimum dim level: 10% of Iout

Maximum output voltage on the dimming wires: 12V

Approved Dimmer List

| Manufacturer | Manufacturer Part Number |
|--------------|---|
| Lutron | Visit www.lutron.com/advance for a list of dimmers (Mark VII) that will work with this driver |
| Leviton | IllumaTech IP7 series |
| Advance | Sunrise - SR1200ZTUNV |

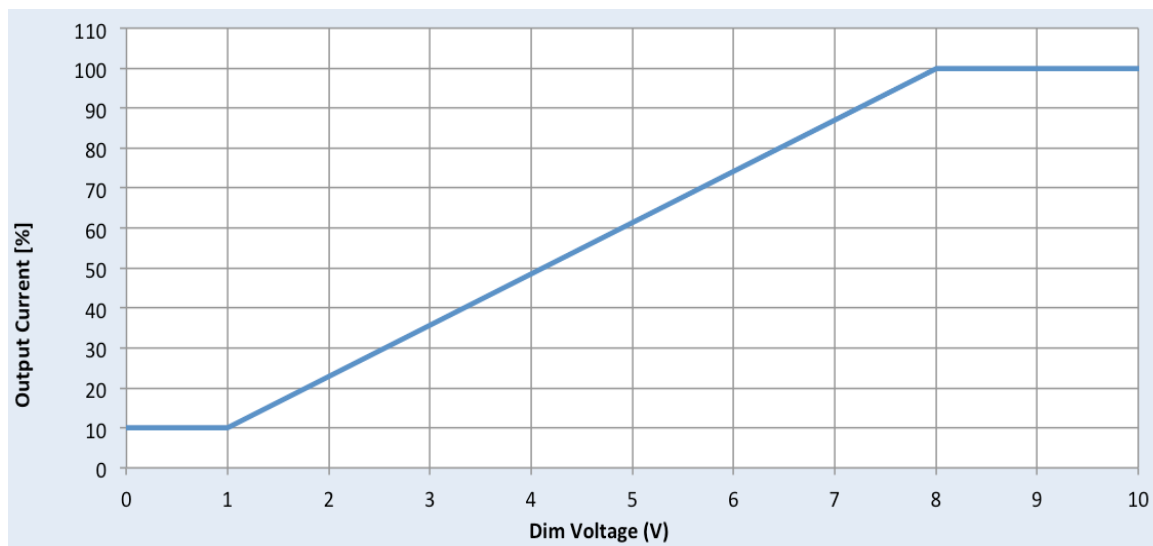


Xitanium XH150C105V140CNF1

150W 347-480V 1.05A 0-10V

Performance Characteristics


Based on measurements on a typical sample. The accuracy of the measurements is within the tolerance of the measurement instruments. The graphs are meant to be a guideline and not a specification.

Output Current Vs. Driver Case Temperature

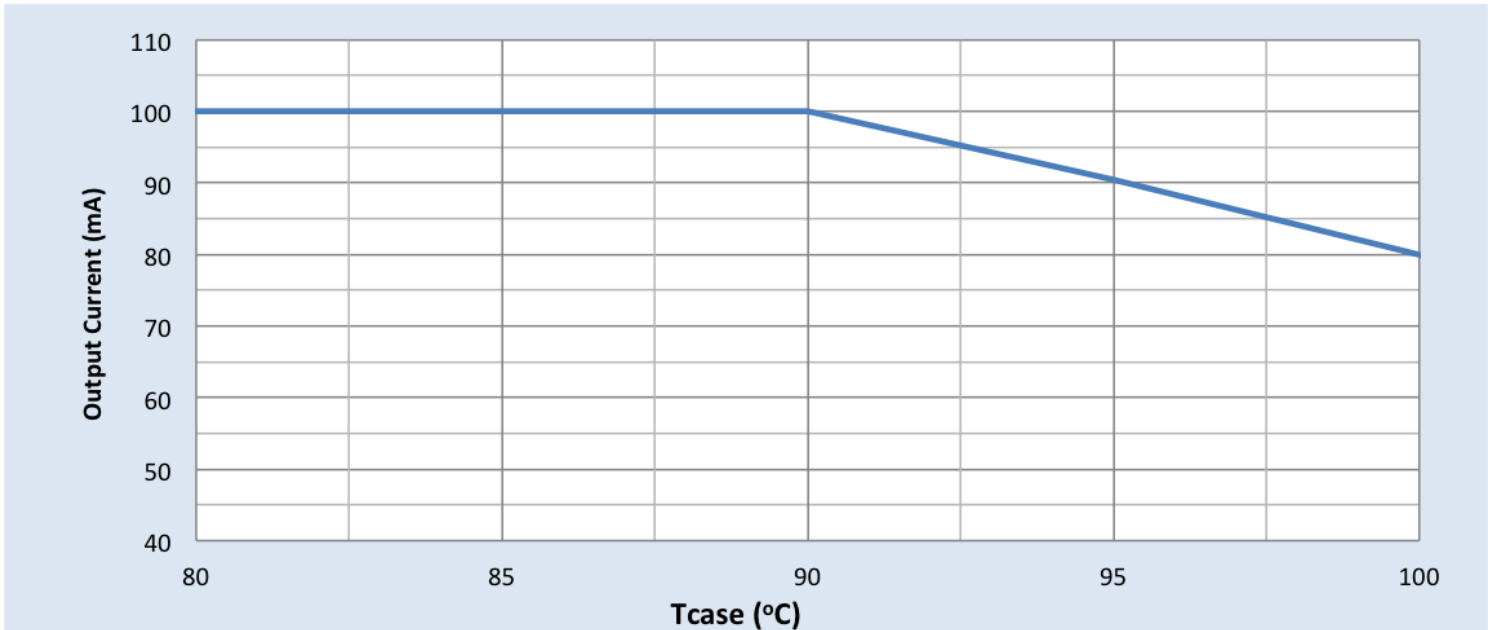

Note: There is $\pm 5^\circ\text{C}$ tolerance on the driver case temperature.

Driver Lifetime Vs. Driver Case Temperature

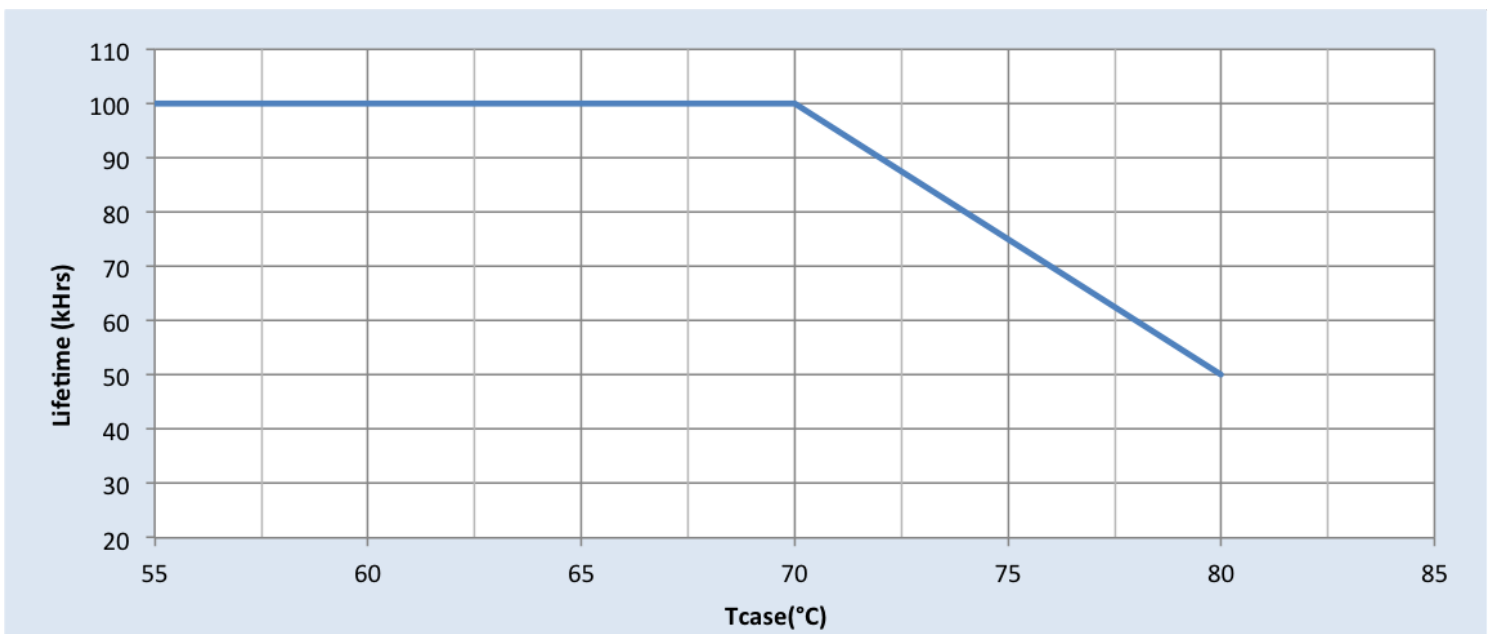


Xitanium XH150C105V140CNF1

150W 347-480V 1.05A 0-10V

Performance Characteristics

Based on measurements on a typical sample. The accuracy of the measurements is within the tolerance of the measurement instruments. The graphs are meant to be a guideline and not a specification.

Efficiency Vs. Output Voltage

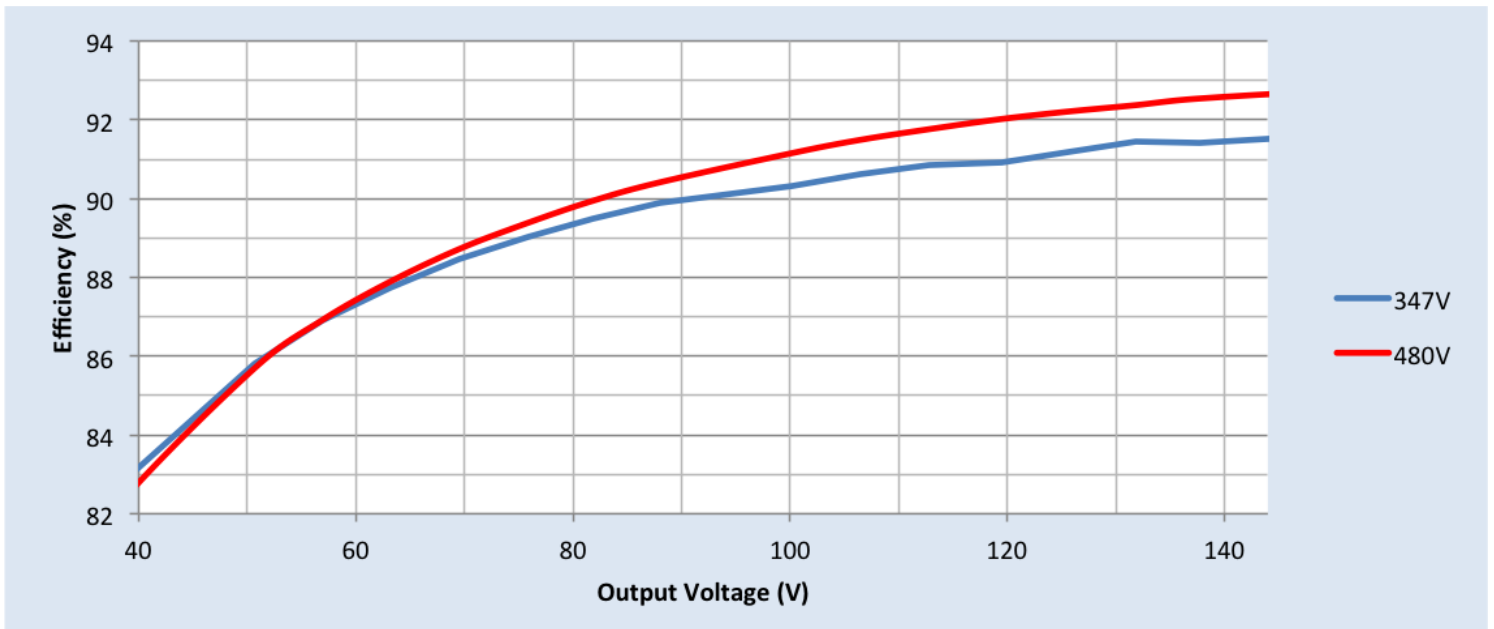


Xitanium XH150C105V140CNF1

150W 347-480V 1.05A 0-10V


Performance Characteristics

Based on measurements on a typical sample. The accuracy of the measurements is within the tolerance of the measurement instruments. The graphs are meant to be a guideline and not a specification.

Power Factor Vs. Output Power

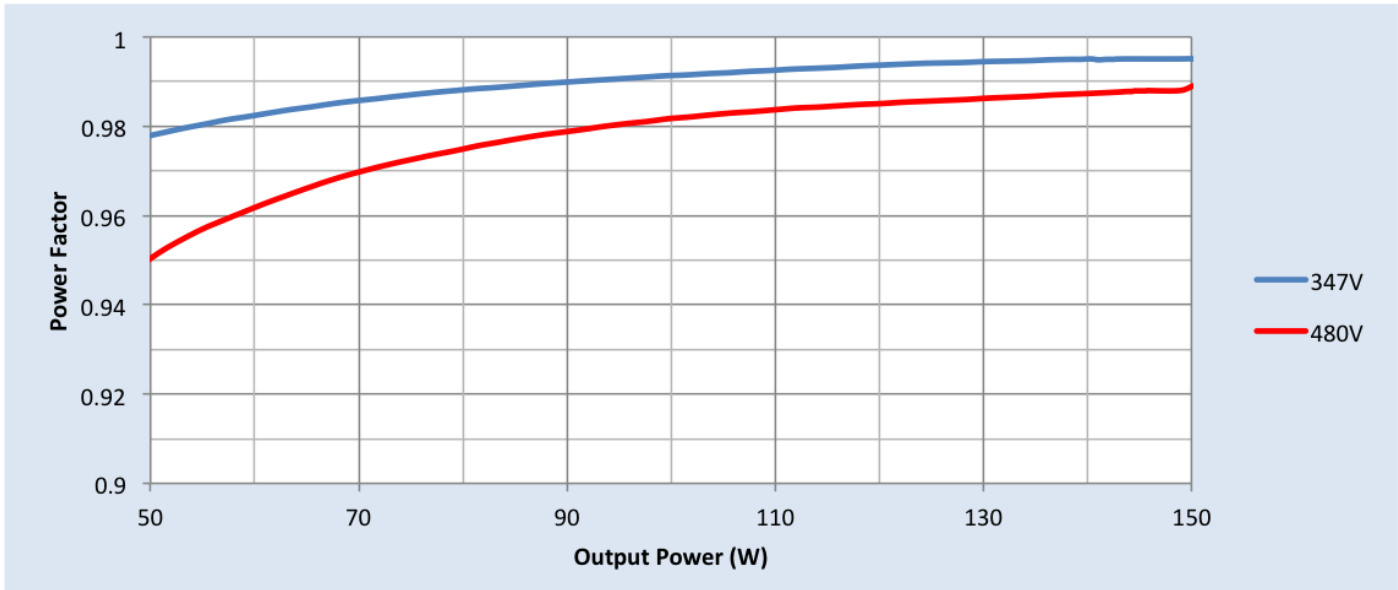


Total Harmonic Distortion (THD) Vs. Output Power

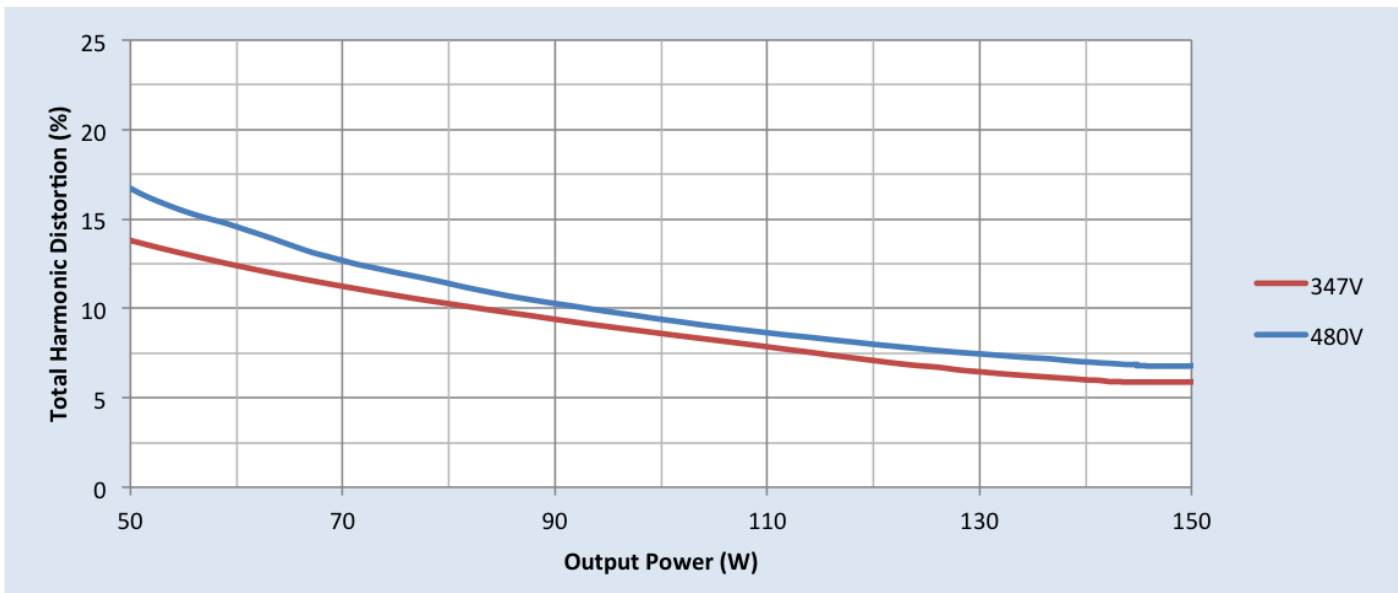

Xitanium XH150C105V140CNF1

150W 347-480V 1.05A 0-10V

Inrush Current Info

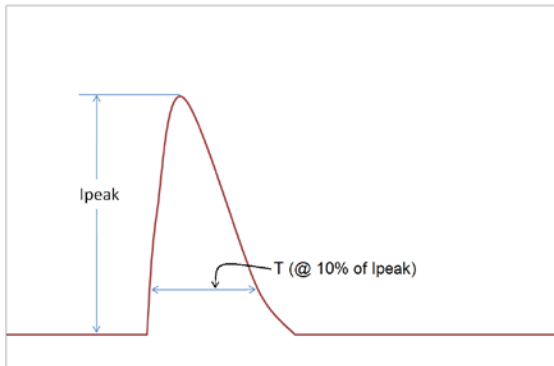

| V_{in} | I_{peak} | T (@ 10% of I_{peak}) |
|----------|------------|----------------------------|
| 347 Vrms | 56A | 196 μ s |
| 480 Vrms | 77A | 196 μ s |

Inrush current is measured at peak of the corresponding line voltage, source impedance per NEMA 410.

Lightning Surge Info

| ANSI Surge Type | Differential Mode (L-N) | Common Mode (L-G, N-G, L&N-G) |
|---|-------------------------|-------------------------------|
| 1.2/50 μ s Combination Wave (w/t 2 Ω) | 6kV | 6kV |

Isolation

| Isolation | Input | Output | 0-10V | Enclosure |
|---------------------|---------|---------|-------|-----------|
| Input | NA | 2xU+1kV | 2.5kV | 2xU+1kV |
| Output | 2xU+1kV | NA | 2.5kV | 2xU+1kV |
| 0-10V (Class 1 & 2) | 2.5kV | 2.5kV | NA | 2.5kV |
| Enclosure | 2xU+1kV | 2xU+1kV | 2.5kV | NA |

U = Max. input voltage

The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract.

