


Bridgelux® EB Series™ Gen 3

Product Data Sheet DS132



Introduction

EB Series™

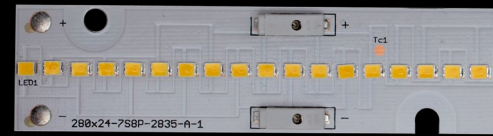

EB Series Gen 3 linear modules are designed for use in premium indoor applications where a high efficacy is required. The new generation uses the high-efcacy SMDs to achieve over 200lm/W, which enables designers and fixture manufacturers to meet DLC Premium requirements. They are designed for linear troffers, pendants and other luminaires in indoor commercial applications.

Available in 280 mm, 560 mm, and 1120 mm lengths, the modules can be connected end-to-end thereby providing flexibility in designing luminaires. The Zhaga compatible modules further simplify design by providing easy mounting options, reusable poke-in connectors and by being compatible with a variety of off-the-shelf optics. The modules have long lifetimes of greater than 50,000 hours.

Features

- High efficacy of up to 200 lm/W (nominal)
- Now available in both 80 CRI and 90 CRI
- Available in a variety of color temperatures from 2700K to 5700K
- Wide lumen range with 2x overdrive capability
- Designed following Zhaga standards L28W2 and L56W2

Benefits

- Achieve over 200 lm/W by under-driving
- Long lifetime (L80, B50 > 50,000 hours)
- Heat-sinking may not be required at low drive currents
- Reliable use at elevated currents for greater design flexibility
- Easy installation using mounting holes and poke-in connectors




Contents

Product Feature Map	2
Product Nomenclature	2
Product Selection Guide	3
Electrical Characteristics	4
Absolute Maximum Ratings	5
Performance Curves	6
Typical Radiation Pattern	8
Typical Color Spectrum	9
Mechanical Dimensions	10
Color Binning Information	12
Packaging and Labeling	13
Design Resources	14
Precautions	14
Disclaimers	14
About Bridgelux	15


Product Feature Map

Bridgelux EB Series Gen 3 modules are fully engineered devices that provide consistent thermal and optical performance on an engineered mechanical platform. The linear products incorporate several features to simplify design integration and assembly. Please visit www.bridgelux.com for more information on the EB Series family of products.

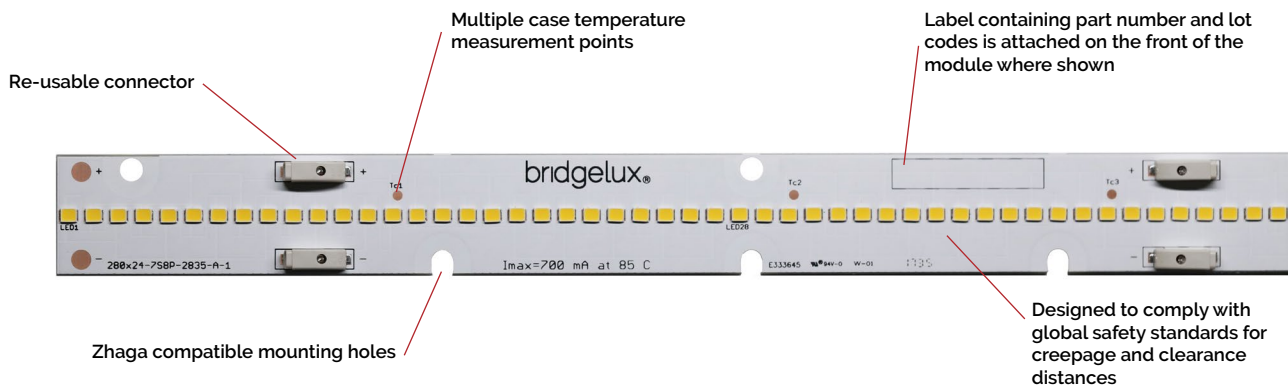

Product Nomenclature

The part number designation for Bridgelux EB Series Gen 3 is explained as follows:

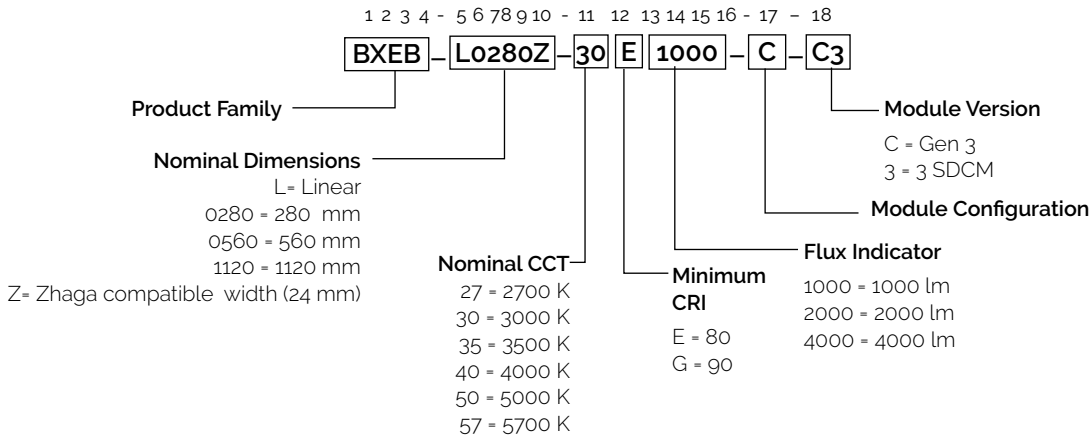

Product Selection Guide

Table 1: Product Performance ($T_c = 25^\circ\text{C}$)

Part Number	Nominal CCT ¹ (K)	Min CRI	Typical Flux ^{2,3} $T_c = 25^\circ\text{C}$ (lm)	Nominal Drive Current (mA)	Typical V_f (V)	Typical Power (W)	Typical Efficacy (lm/W)
BXEB-L0280Z-27E1000-C-C3	2700	80	1190	350	19.1	6.7	178
BXEB-L0280Z-27G1000-C-C3		90	1045				156
BXEB-L0280Z-30E1000-C-C3	3000	80	1250				187
BXEB-L0280Z-30G1000-C-C3		90	1100				164
BXEB-L0280Z-35E1000-C-C3	3500	80	1250				187
BXEB-L0280Z-35G1000-C-C3		90	1100				164
BXEB-L0280Z-40E1000-C-C3	4000	80	1340				200
BXEB-L0280Z-40G1000-C-C3		90	1100				164
BXEB-L0280Z-50E1000-C-C3	5000	80	1340				200
BXEB-L0280Z-50G1000-C-C3		90	1100				164
BXEB-L0280Z-57E1000-C-C3	5700	80	1340				200
BXEB-L0280Z-57G1000-C-C3		90	1100				164
BXEB-L0560Z-27E2000-C-C3	2700	80	2380	700	19.1	13.4	178
BXEB-L0560Z-27G2000-C-C3		90	2085				156
BXEB-L0560Z-30E2000-C-C3	3000	80	2490				186
BXEB-L0560Z-30G2000-C-C3		90	2195				164
BXEB-L0560Z-35E2000-C-C3	3500	80	2490				186
BXEB-L0560Z-35G2000-C-C3		90	2195				164
BXEB-L0560Z-40E2000-C-C3	4000	80	2675				200
BXEB-L0560Z-40G2000-C-C3		90	2195				164
BXEB-L0560Z-50E2000-C-C3	5000	80	2675				200
BXEB-L0560Z-50G2000-C-C3		90	2195				164
BXEB-L0560Z-57E2000-C-C3	5700	80	2675				200
BXEB-L0560Z-57G2000-C-C3		90	2195				164
BXEB-L1120Z-27E4000-C-C3	2700	80	4760	700	38.3	26.8	178
BXEB-L1120Z-27G4000-C-C3		90	4160				155
BXEB-L1120Z-30E4000-C-C3	3000	80	4980				186
BXEB-L1120Z-30G4000-C-C3		90	4390				164
BXEB-L1120Z-35E4000-C-C3	3500	80	4980				186
BXEB-L1120Z-35G4000-C-C3		90	4390				164
BXEB-L1120Z-40E4000-C-C3	4000	80	5350				200
BXEB-L1120Z-40G4000-C-C3		90	4390				164
BXEB-L1120Z-50E4000-C-C3	5000	80	5350				200
BXEB-L1120Z-50G4000-C-C3		90	4390				164
BXEB-L1120Z-57E4000-C-C3	5700	80	5350				200
BXEB-L1120Z-57G4000-C-C3		90	4390				164

Notes for Table 1:

- Nominal CCT as defined by ANSI C78.377-2011.
- Data is at nominal test current where temperature of center case temperature point $T_c = 25^\circ\text{C}$.
- Bridgelux maintains a $\pm 7\%$ tolerance on flux data.

Electrical Characteristics

Table 2: Electrical Characteristics

Part Number	Drive Current (mA)	Forward Voltage $T_{c2} = 25^{\circ} \text{C (V)}$ ^{1, 2, 3}			Typical Coefficient of Forward Voltage ⁴ $\Delta V_f / \Delta T$ (mV/°C)	Driver Selection Voltages ⁵ (V)	
		Minimum	Typical	Maximum		V_f Min, Hot $T_{c2} = 85^{\circ} \text{C (V)}$	V_f Max, Cold $T_{c2} = -40^{\circ} \text{C (V)}$
BXEB-L0280Z-xxx1000-C-C3	350	17.8	19.1	20.4	-7.2	17.3	20.9
	700	18.8	20.2	21.6	-7.2	18.4	22.1
BXEB-L0560Z-xxx2000-C-C3	700	17.8	19.1	20.4	-7.2	17.3	20.9
	1400	18.8	20.2	21.6	-7.2	18.4	22.1
BXEB-L1120Z-xxx4000-C-C3	700	35.6	38.3	41.0	-14.3	34.8	41.9
	1400	37.7	40.5	43.3	-14.3	36.8	44.3

Notes for Table 2:

1. Voltage minimum and maximum are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a tolerance of $\pm 0.1 \text{ V}$ on forward voltage data.
3. This product has been designed and manufactured per IEC 62031:2014. The working voltage designated for the insulation is 60 V d.c. The maximum allowable voltage across the module must be determined in the end product application.
4. Typical coefficient of forward voltage tolerance is $\pm 0.1 \text{ mV}$ for nominal current.
5. V_f min hot and max cold values are provided as reference only and are not guaranteed. These values are provided to aid in driver design and selection over the operating range of the product.

Absolute Maximum Ratings

Table 3: Maximum Ratings

Parameter	Maximum Rating		
Storage Temperature	-40°C to +85°C		
Operating Case Temperature ² (T _c)	85°C		
Soldering Temperature	350°C or lower for a maximum of 5 seconds		
Maximum Reverse Voltage	Modules are not designed to be driven in reverse bias		
	BXEB-L0280Z-xxx1000-C-C3	BXEB-L0560Z-xxx2000-C-C3	BXEB-L1120Z-xxx4000-C-C3
Maximum Drive Current	700mA	1400mA	1400mA

Notes for Table 3:

1. For IEC 62717 requirement, please consult your Bridgelux sales representative.
2. Lumen maintenance (L70) and lifetime predictions are valid for drive current and case temperature conditions used for LM-80 testing as included in the applicable LM-80 test report for the SMDs used in the modules. Contact your Bridgelux sales representatives for LM-80 report.

Performance Curves

Figure 1: 280mm Current vs. Forward Voltage, $T_c=25^\circ\text{C}$

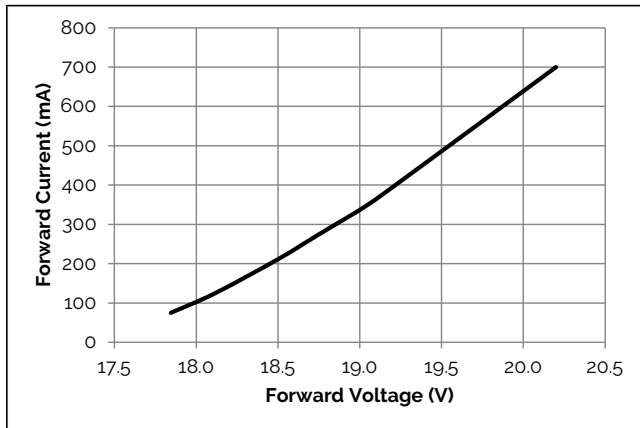


Figure 2: 280mm Relative Flux vs. Current, $T_c=25^\circ\text{C}$

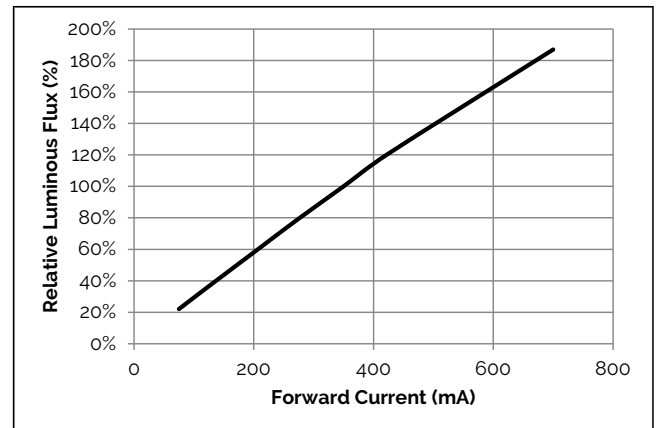


Figure 3: 560mm Current vs. Forward Voltage, $T_c=25^\circ\text{C}$

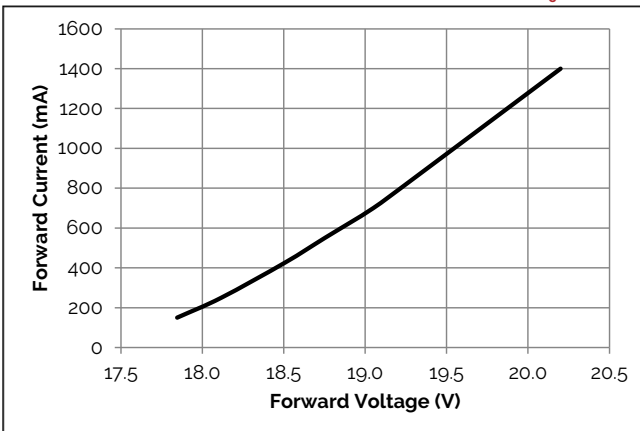


Figure 4: 560mm Relative Flux vs. Current, $T_c=25^\circ\text{C}$

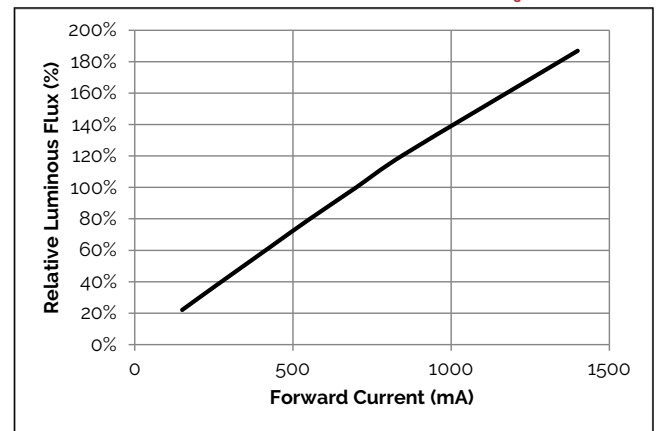


Figure 5: 1120mm Current vs. Forward Voltage, $T_c=25^\circ\text{C}$


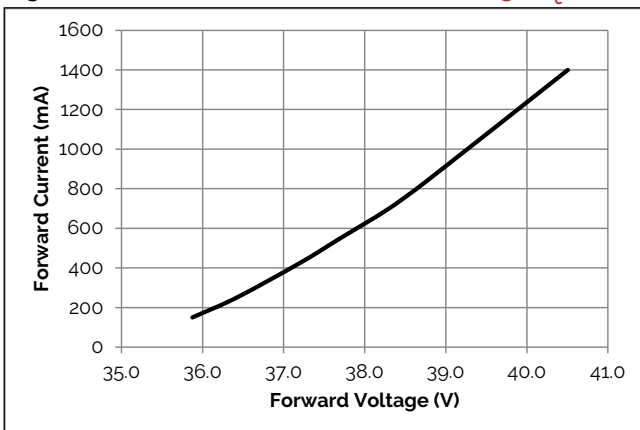


Figure 6: 1120mm Relative Flux vs. Current, $T_c=25^\circ\text{C}$

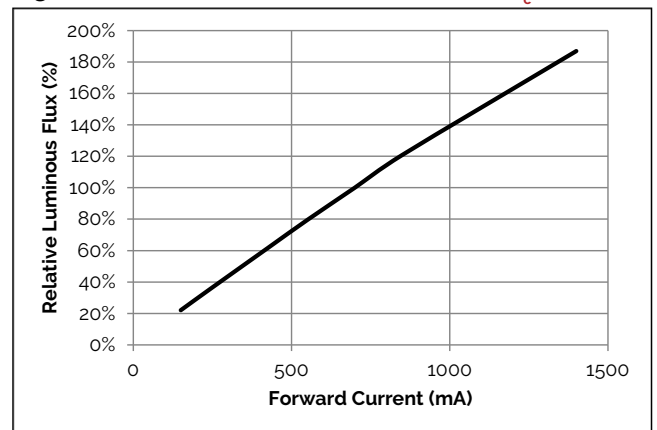

Performance Curves

Figure 7: Relative Voltage vs. Case Temperature



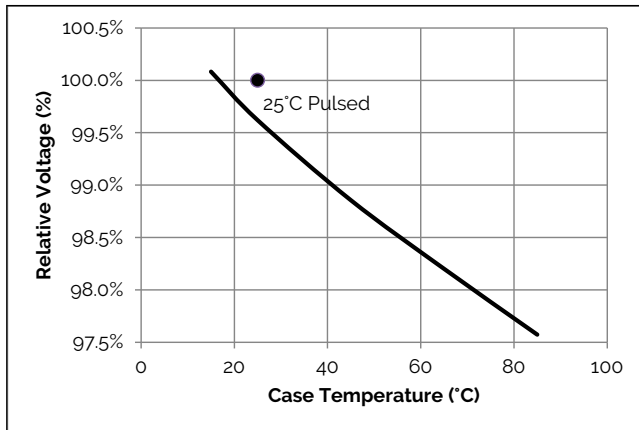


Figure 8: Relative Flux vs. Case Temperature

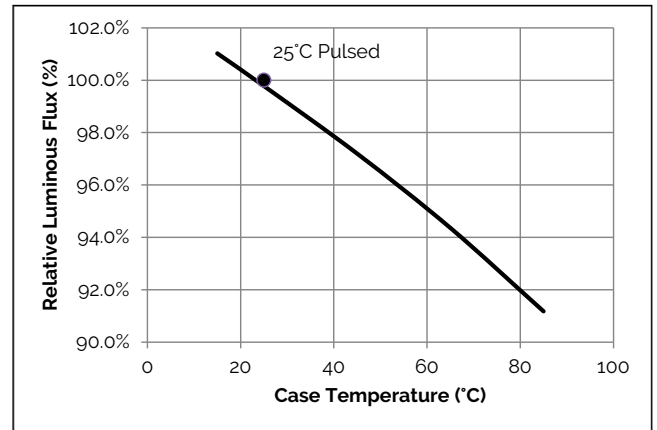

Typical Radiation Pattern

Figure 9: Typical Spatial Radiation Pattern

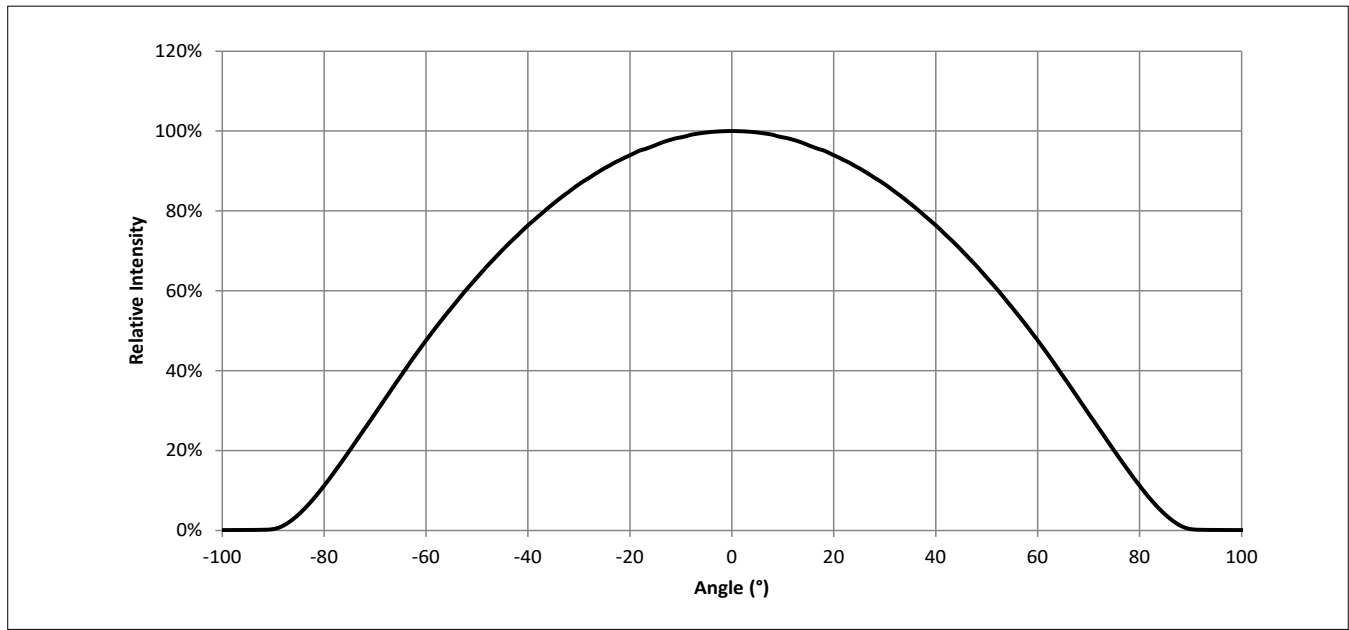

Notes for Figure 9:

1. Typical viewing angle is 120°.
2. The viewing angle is defined as the off axis angle from the centerline where I_v is $\frac{1}{2}$ of the peak value.

Typical Color Spectrum

Figure 10: Typical Color Spectra, 80 CRI


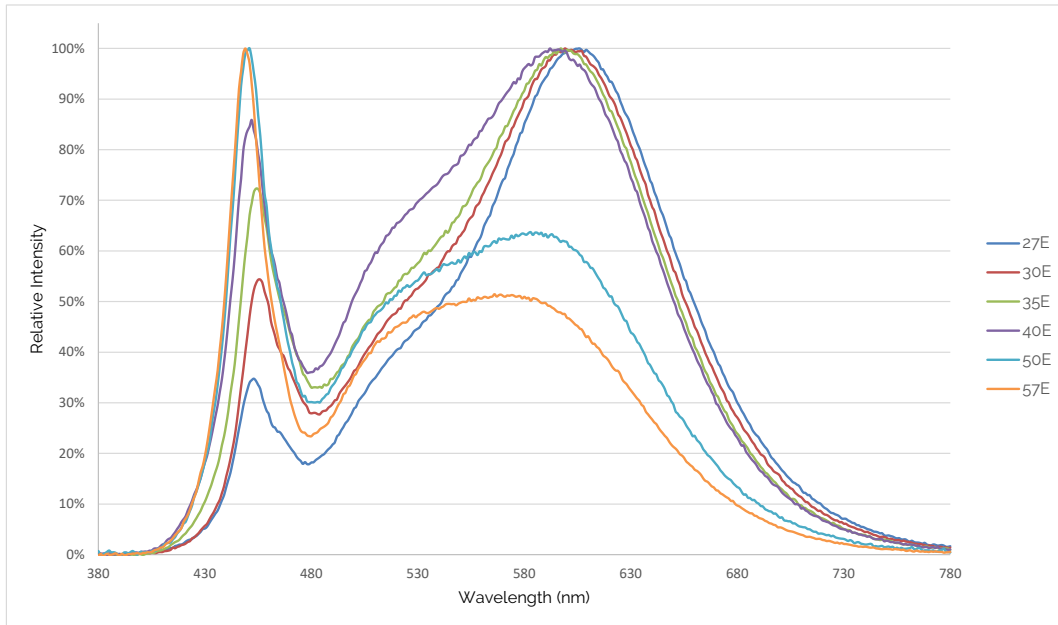


Figure 11: Typical Color Spectra, 90 CRI

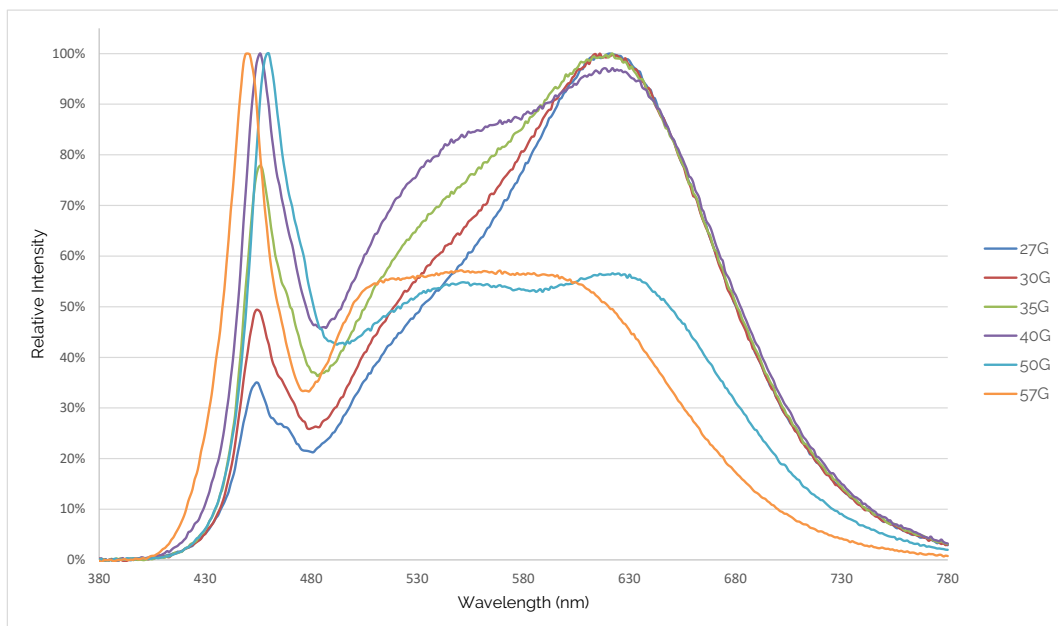

Note for Figures 10 & 11:

1. Color spectra measured at nominal current for $T_c = 85^\circ\text{C}$

Mechanical Dimensions

Figure 12: Drawing for EB Series Gen3

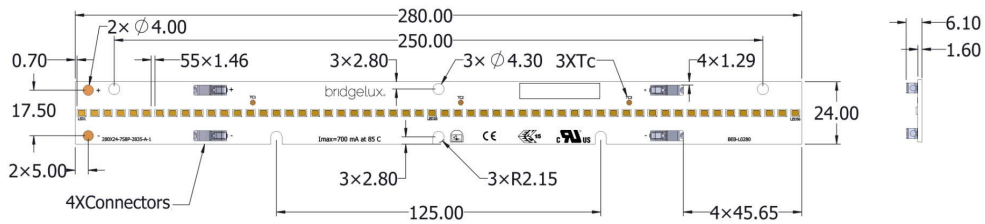


Table 4: Dimensions for 280mm

Parameter	Specification	Unit
Linear length	280	mm
Linear width	24	mm
Linear thickness	6.1	mm
PCB thickness	1.6	mm

Figure 13: Drawing for EB Series Gen3 560mm


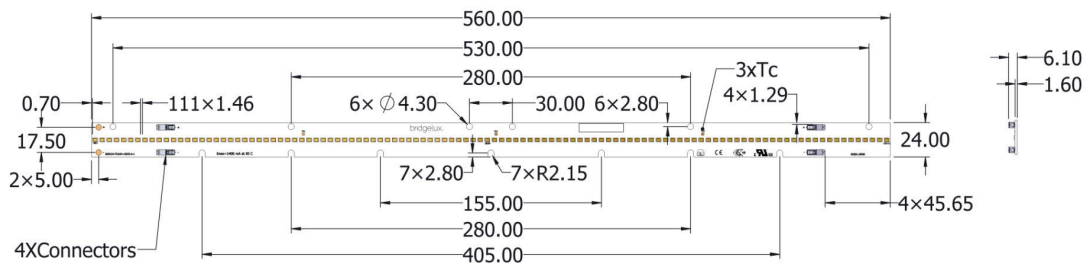


Table 5: Dimensions for 560mm

Parameter	Specification	Unit
Linear length	560	mm
Linear width	24	mm
Linear thickness	6.1	mm
PCB thickness	1.6	mm

Mechanical Dimensions

Figure 14: Drawing for EB Series Gen3 1120mm

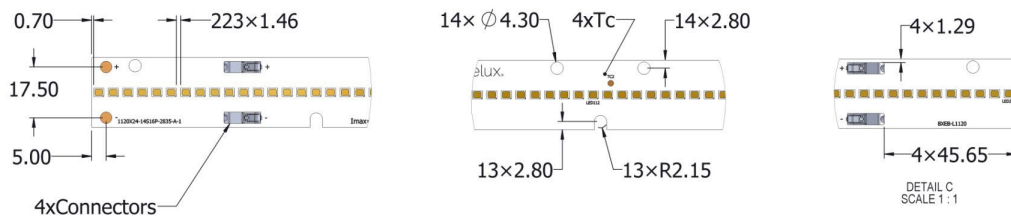

Notes for Figures 12, 13 & 14:

1. Solder pads are labeled "+" to denote positive polarity, and "-" to denote negative polarity.
2. Drawings are not to scale.
3. Drawing dimensions are in millimeters.
4. Unless otherwise specified, the tolerances are $\pm 0.10\text{mm}$.

Table 6: Dimensions for 1120mm

Parameter	Specification	Unit
Linear length	1120	mm
Linear width	24	mm
Linear thickness	6.1	mm
PCB thickness	1.6	mm

Table 7: Connector and wiring

Parameter	Specification
Input wire cross-section	18-24 AWG
Wire strip length	7-9 mm

Color Binning Information

Figure 15: Graph of Warm and Neutral White Test Bins in xy Color Space

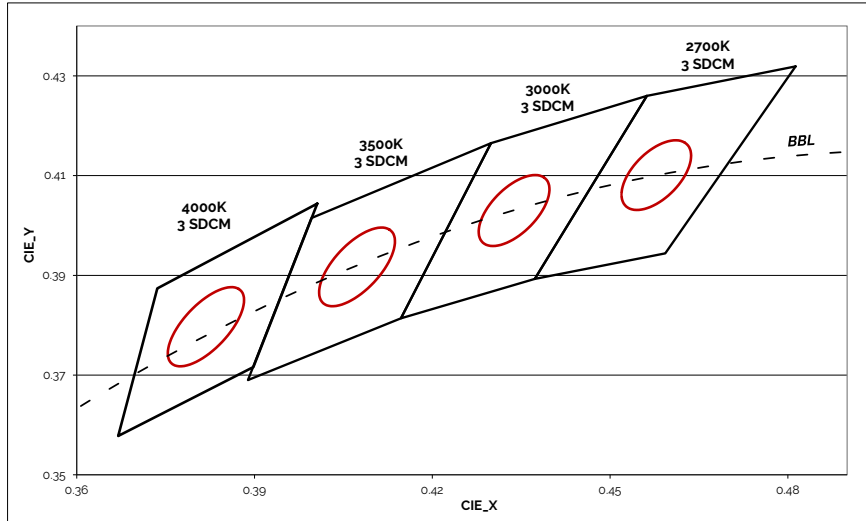


Table 8: Warm and Neutral White xy Bin Coordinates and Associated Typical CCT

Bin Code	2700K	3000K	3500K	4000K
B3 (3 SDCM) CCT Range	2651K - 2794K	2968K - 3136K	3369K - 3586K	3851K - 4130K
Center Point (x, y)	(0.458, 0.410)	(0.434, 0.403)	(0.407, 0.392)	(0.382, 0.380)
ANSI Bin (for reference only)	(2580K - 2870K)	(2870K - 3220K)	(3220K - 3710K)	(3710K - 4260K)

Figure 16: Graph of Cool White Test Bins in xy Color

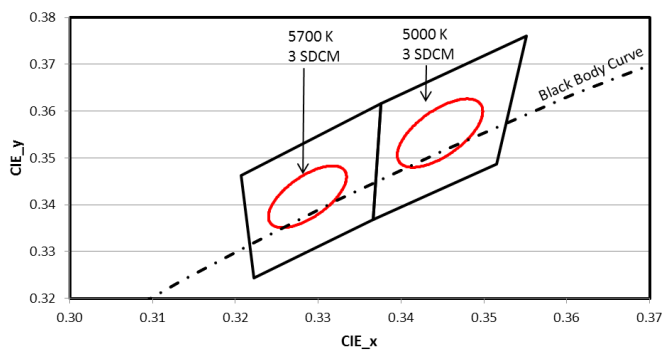


Table 9: Cool White xy Bin Coordinates and Associated Typical CCT

Bin Code	5000K	5700K
B3 (3 SDCM) CCT Range	4835K - 5215K	5490K - 5820K
Center Point (x, y)	(0.3445, 0.355)	(0.329, 0.342)
ANSI Bin (for reference only)	(4745K - 5311K)	(5312K - 6022K)

Notes for Tables 8 and 9

1. Color binning at solder point temperature T_{sp} of SMDs at 85°C.
2. Bridgelux maintains a tolerance of ± 0.007 on x and y color coordinates in the CIE 1931 color space.

Packaging and Labeling

Figure 17: EB Series Packaging and Labeling

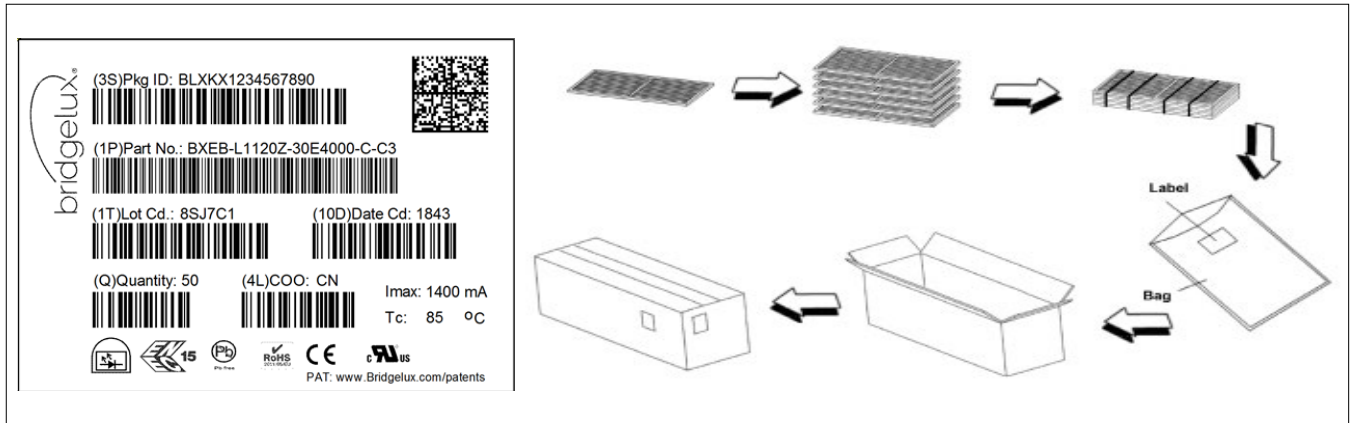


Table 10: Packaging Structure

L0280 modules	Tray	Box
Quantity	40	200
Dimension	63 cm x 39 cm x 2.4 cm	65.5 cm x 41.5 cm x 15.5 cm
L0560 modules	Tray	Box
Quantity	20	100
Dimension	63 cm x 39 cm x 2.4 cm	65.5 cm x 41.5 cm x 15.5 cm
L1120 modules	Tray	Box
Quantity	20	100
Dimension	119 cm x 39 cm x 2.4 cm	134 cm x 44 cm x 18.5 cm

Figure 18: Product Labeling

Bridgelux EB Series modules contain a label on the front to help with product identification. In addition to the product identification markings, Bridgelux EB Series modules also contain markings for internal Bridgelux manufacturing use only. The image below shows which markings are for customer use and which ones are for Bridgelux internal use only. The Bridgelux internal manufacturing markings are subject to change without notice, however these will not impact the form, function or performance of the module.



EB Series Gen3
1ft 1000lm 350mA

Customer Use- 2D Barcode
Scannable barcode provides
product part number and other
Bridgelux internal production
information.

Design Resources

Application Notes

Bridgelux has developed a comprehensive set of application notes and design resources to assist customers in successfully designing with the EB Series product family. For a list of resources under development, visit www.bridgelux.com.

Optical Source Models

Optical source models and ray set files are available for all Bridgelux products. For a list of available formats, visit www.bridgelux.com.

3D CAD Models

Three dimensional CAD models depicting the product outline of all Bridgelux EB Series LED linears are available in both IGES and STEP formats. Please contact your Bridgelux sales representative for assistance.

Precautions

CAUTION: CHEMICAL EXPOSURE HAZARD

Exposure to some chemicals commonly used in luminaire manufacturing and assembly can cause damage to the LED linear. Please consult Bridgelux Application Note for additional information.

CAUTION: EYE SAFETY

Eye safety classification for the use of Bridgelux EB Series is in accordance with IEC/TR62778: Application of IEC 62471 for the assessment of blue light hazard to light sources and luminaires. EB Series linears are classified as Risk Group 1 (TBD) when operated at or below the maximum drive current. Please use appropriate precautions. It is important that employees working with LEDs are trained to use them safely.

CAUTION: RISK OF BURN

Do not touch the EB Series linears during operation. Allow the linear to cool for a sufficient period of time before handling. The EB Series linears may reach elevated temperatures such that could burn skin when touched.

CAUTION

CONTACT WITH LIGHT EMITTING SURFACE (LES)

Avoid any contact with the LES. Do not touch the LES of the linear or apply stress to the LES (yellow phosphor resin area). Contact may cause damage to the linear.

Optics and reflectors must not be mounted in contact with the LES (yellow phosphor resin area). Optical devices may be mounted on the top surface of the EB Series linear. Use the mechanical features of the linear housing, edges and/or mounting holes to locate and secure optical devices as needed.

Disclaimers

STANDARD TEST CONDITIONS

Unless otherwise stated, linear testing is performed at the nominal drive current.

MINOR PRODUCT CHANGE POLICY

The rigorous qualification testing on products offered by Bridgelux provides performance assurance. Slight cosmetic changes that do not affect form, fit, or function may occur as Bridgelux continues product optimization.

About Bridgelux: Bridging Light and Life™

At Bridgelux, we help companies, industries and people experience the power and possibility of light. Since 2002, we've designed LED solutions that are high performing, energy efficient, cost effective and easy to integrate. Our focus is on light's impact on human behavior, delivering products that create better environments, experiences and returns—both experiential and financial. And our patented technology drives new platforms for commercial and industrial luminaires.

For more information about the company, please visit
bridgelux.com
twitter.com/Bridgelux
facebook.com/Bridgelux
youtube.com/user/Bridgelux
linkedin.com/company/bridgelux-inc-_2
WeChat ID: BridgeluxInChina



46430 Fremont Blvd
Fremont, CA 94538 USA
Tel (925) 583-8400
Fax (925) 583-8401
www.bridgelux.com

© 2019 Bridgelux, Inc. All rights reserved. Product specifications are subject to change without notice. Bridgelux and the Bridgelux stylized logo design are registered trademarks of Bridgelux, Inc. EB Series and Bridging Light and Life are trademarks of Bridgelux, Inc. All other trademarks are the property of their respective owners.

Bridgelux EB Series Gen3 Data Sheet DS132 Rev. A (06/2019)