


Low Profile (0.72" H x 0.72" W), Programmable, Constant Current Class 2 LED Driver with 0-10 V Dimming

Nominal Input Voltage	Max. Output Power	Efficiency	Max. Case Temperature	THD	Power Factor	Dimming Method	Dimming Range	Startup Time
120 & 277 Vac	50 W	up to 90% typical	90°C (measured at the hot spot)	< 20%	> 0.9	0 - 10V	1 - 100% (% of lout)	300 ms typical



Flying Leads Case
 L 198.7 * W 18.25 * H 18.25 mm
 (L 7.82 * W 0.72 * H 0.72 in.)

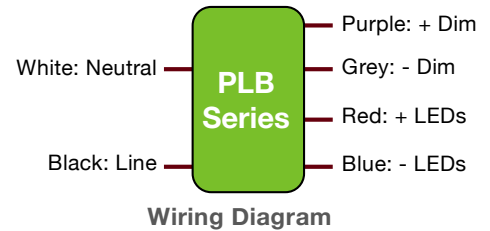


FEATURES

- Non-linear 0-10V dimming profile pre-loaded by default (10V to 9.1V=100%, 9.0 to 1.5V=linear, <1.5V=1%)
- The 0-10 V circuit is isolated from both the AC input and the DC output.
- Diming is achieved by using linear constant current reduction
- UL Class P
- Class 2 power supply
- Lifetime: 50,000 hours @ Tc = 75°C
- 90°C maximum case hot spot temperature
- IP20-rated case with silicone-based potting
- Indoor surge protection:
 - IEC61000-4-5: 2 kV line to line/2 kV line to earth
 - 2.5 kV ring wave: ANSI/IEEE c62.41.1-2002 & c62.41.2-2002 category A
- Complies with ENERGY STAR®, DLC (DesignLight Consortium®) and CA Title 24 technical requirements

PROGRAMMING

- Serial port programming
 - Current: 100% to 50% in each voltage range
 - Data log read: SKU, S/N, lot code, hours of operation, FW rev., fault events: power failure, transients (short or surge), thermal
- Fully programmable and selectable 0-10V dimming profiles: Non-linear with dim-to-off, Logarithmic, Non-Linear without dim-to-off.

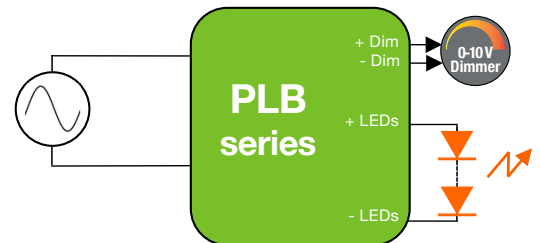

Low Profile (0.72" H x 0.72" W), Programmable, Constant Current Class 2 LED Driver with 0-10 V Dimming

1 - ORDERING INFORMATION

ERP Part Number	Nominal Input Voltage (Vac)	Max Output Power (W)	Iout (mA)	Vout Min. (Vdc)	Vout Nom. (Vdc)	Vout Max. (Vdc)	Open Loop (No Load) Voltage (Vdc)
PLB15W							
PLB15W-0300-38	120 & 277	11.4	100 to 300	26	32	38	50
PLB30W							
PLB30W-0600-38	120 & 277	22.8	300 to 600	26	32	38	50
PLB50W							
PLB50W-1200-38	120 & 277	45.6	600 to 1200	26	32	38	50

Low Profile (0.72" H x 0.72" W), Programmable, Constant Current Class 2 LED Driver with 0-10 V Dimming

2 - INPUT SPECIFICATION (@25°C ambient temperature)

	Units	Minimum	Typical	Maximum	Notes
Input Voltage Range (Vin)	Vac	90	120 & 277	305	<ul style="list-style-type: none"> The rated output current for each model is achieved at Vin ≥ 108 Vac & at Vin ≥ 249 Vac At nominal load
Input Frequency Range	Hz	47	60	63	
Input Current (Iin)	A			0.5 A @ 120 Vac 0.23 A @ 277 Vac	
Power Factor (PF)		0.9	> 0.9		<ul style="list-style-type: none"> At nominal input voltage and with nominal LED voltage From 100% to 60% of output current
Inrush Current	A	Meets NEMA-410 requirements			At any point on the sine wave and 25°C
Leakage Current	mA			0.3 mA @ 120 Vac 0.7 mA @ 277 Vac	Measured per IEC60950-1
Input Harmonics	Complies with IEC61000-3-2 for Class C equipment				
Total Harmonics Distortion (THD)				20%	<ul style="list-style-type: none"> At nominal input voltage and nominal LED voltage From 100% to 60% of output current Complies with DLC (Design Light Consortium) technical requirements
Efficiency	%	82%	up to 90%	-	<ul style="list-style-type: none"> Measured with nominal input voltage, a full sinusoidal wave form and without dimmer attached. The PLB15W-0300-38 has a nominal power range of 9.6 W (when programmed at 300 mA) down to 3.2 W (when programmed at 100 mA). The efficiency of the PLB15W-0300-38 will be ≥ 78% for nominal output power ≤ 10W and ≥ 75% for nominal output power ≤ 5W.
Isolation	The AC input to the main DC output is isolated.				

3 - MAIN OUTPUT SPECIFICATION (@25°C ambient temperature)

	Units	Minimum	Typical	Maximum	Notes
Output Voltage (Vout)	Vdc				See ordering information for details
Output Current (Iout)	mA				<ul style="list-style-type: none"> See ordering information for details The rated output current for each model is achieved at Vin ≥ 108 Vac & at Vin ≥ 198 Vac.
Output Current Regulation	%	-5	±2.5	5	<ul style="list-style-type: none"> At nominal AC line voltage Includes load and current set point variations
Output Current Overshoot	%	-	-	10	The driver does not operate outside of the regulation requirements for more than 500 ms during power on with nominal LED load and without dimmer.
Ripple Current		≤ 10% of rated output current @ 100% load & frequency > 94 kHz ≤ 25% of rated output current @ 20% load & frequency > 94 kHz			<ul style="list-style-type: none"> Measured at nominal LED voltage and nominal input voltage Calculated in accordance with the IES Lighting Handbook, 9th edition
Dimming Range (% of Iout)	%	1		100	<ul style="list-style-type: none"> The dimming range is dependent on each specific dimmer. It may not be able to achieve 1% dimming with some dimmers. Dimming performance is optimal when the driver is operated at its nominal output voltage matching the LED nominal Vf (forward voltage). Dimming performance may vary when the driver is operated near its minimum output voltage.
Start-up Time	ms		300	500	<ul style="list-style-type: none"> Without any dimmer attached, and at nominal input voltages and nominal load Measured from application of AC line voltage to 100% light output Complies with ENERGY STAR® luminaire specification and CA Title 24
Isolation	The main DC output is certified and tested per UL8750 LVLE.				

Low Profile (0.72" H x 0.72" W), Programmable, Constant Current Class 2 LED Driver with 0-10 V Dimming

4 - 0-10 V DIMMING CONTROL (@25°C ambient temperature)

The 0-10V profile with 1% minimum dimming (show in figure 1) and no dim-to-off is pre-loaded as the default profile in the driver.

Other pre-defined 0-10V dimming profiles can be selected, such as a logarithmic profile, a non-linear profile with 1% minimum dimming and dim-to-off, and a non-linear profile with 10% minimum dimming and no dim-to-off. Furthermore, every point in the non-linear dimming profile can be programmed using the programming software.

Dimming is achieved by using linear constant current reduction.

0-10V dimming is also protected from mis-wiring of AC to 0-10V dimming for all nominal AC input voltage.

	Units	Minimum	Typical	Maximum	Notes
+Dim Signal, -Dim Signal		The PLB driver series operate only with 0-10V dimmers that sink current. The method to dim the output current of the driver is done via the +Dim/-Dim Signal pins. The +Dim/-Dim signal pins can be used to adjust the output setting via a standard commercial wall dimmer, an external control voltage source (0 to 10 Vdc), or a variable resistor when using the recommended number of LEDs. The dimming input permits 1% to 100% dimming.			
Dimming Profile (see figure 1)		100% of output current between 10 V and 8.0 V, Linear between 8.0 V and 1.0 V, 1% of output current below 1.0 V.			
Dimming Range	%	1		100	As a percent of the output current
High Level Voltage - A	V		8.0		
Low Level Voltage - B	V		1.0		
Current Supplied by the +Dim Signal Pin	mA			1	
Output Current Tolerance While Being Dimmed	%			±5	The tolerance of the output current while being dimmed is ≤ +/-5% until Iout=20% of rated current.
Minimum Dimming Tolerance	%	0.8	1	2	
Isolation	The 0-10 V circuit is isolated from both the AC input and DC output.				

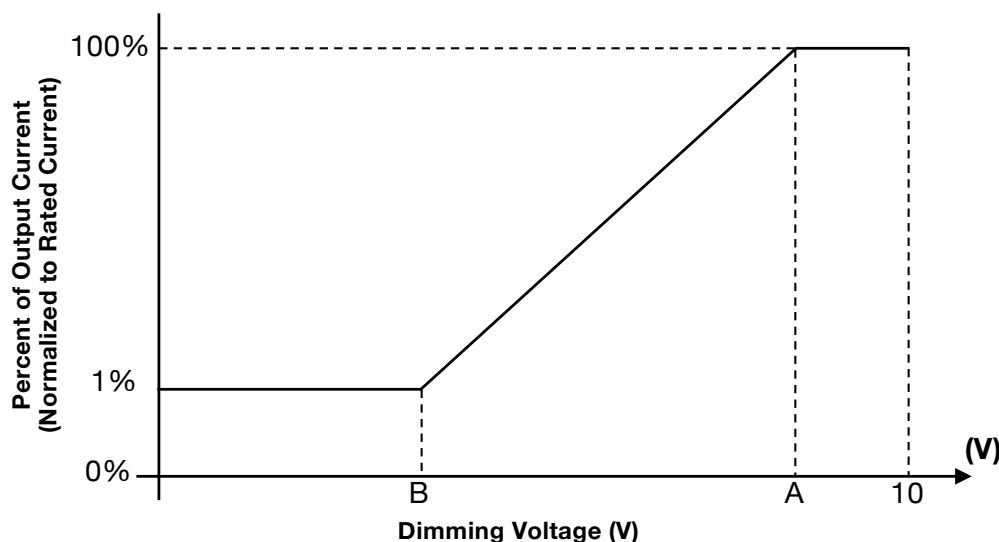


Figure 1

Low Profile (0.72" H x 0.72" W), Programmable, Constant Current Class 2 LED Driver with 0-10 V Dimming

5 - ENVIRONMENTAL CONDITIONS

	Units	Minimum	Typical	Maximum	Notes
Operating Ambient Temperature (Ta)	°C	-20		50	
Maximum Case Temperature (Tc)	°C			+90	Case temperature measured at the hot spot •tc
Storage Temperature	°C	-40		+85	
Humidity	%	5	-	95	Non-condensing
Cooling	Convection cooled				
Acoustic Noise	dBA			22	Measured at a distance of 0.3 meter, without dimmer
Mechanical Shock Protection	per EN60068-2-27				
Vibration Protection	per EN60068-2-6 & EN60068-2-64				
MTBF	> 200,000 hours when operated at nominal input and output conditions, and at Tc ≤ 75°C				
Lifetime	50,000 hours at Tc ≤ 75°C maximum case hot spot temperature				

6 - EMC COMPLIANCE AND SAFETY APPROVALS

EMC Compliance

Conducted and Radiated EMI	Compliant with FCC CFR Title 47 Part 15 Class B at 120 Vac & Class A at 277 Vac				
Harmonic Current Emissions	IEC61000-3-2	For Class C equipment			
Voltage Fluctuations & Flicker	IEC61000-3-3				
Immunity Compliance	ESD (Electrostatic Discharge)	IEC61000-4-2	6 kV contact discharge, 8 kV air discharge, level 3		
	RF Electromagnetic Field Susceptibility	IEC61000-4-3	3 V/m, 80 - 1000 MHz, 80% modulated at a distance of 3 meters		
	Electrical Fast Transient	IEC61000-4-4	± 2 kV on AC power port for 1 minute, ±1 kV on signal/control lines		
	Surge	IEC61000-4-5	•± 2 kV line to line (differential mode) /± 2 kV line to common mode ground (tested to secondary ground) on AC power port, ±0.5 kV for outdoor cables		
			ANSI/IEEE c62.41.1-2002 & c62.41.2-2002 category A, 2.5 kV ring wave		
Conducted RF Disturbances	IEC61000-4-6	3V, 0.15-80 MHz, 80% modulated			
Voltage Dips	IEC61000-4-11	>95% dip, 0.5 period; 30% dip, 25 periods; 95% reduction, 250 periods			

Safety Agency Approvals

UL	UL8750 listed LVLE, Class P
cUL	CAN/CSA C22.2 No. 250.13-14 LED equipment for lighting applications

Safety

	Units	Minimum	Typical	Maximum	Notes
Hi Pot (High Potential) or Dielectric voltage-withstand	Vdc	2500			<ul style="list-style-type: none"> Insulation between the input (AC line and Neutral) and the output Tested at the RMS voltage equivalent of 1767 Vac

Low Profile (0.72" H x 0.72" W), Programmable, Constant Current Class 2 LED Driver with 0-10 V Dimming

■ 7 - PROTECTION FEATURES

Input Over Current Protection

The PLB customer LED driver series incorporates a primary AC line fuse for input over current protection to prevent damage to the LED driver and meet product safety requirements as outlined in Section 6.

Short Circuit and Over Current Protection

The PLB customer LED driver series is protected against short-circuit such that a short from any output to return shall not result in a fire hazard or shock hazard. The driver shall hiccup as a result of a short circuit or over current fault. Removal of the fault will return the driver to within normal operation. The driver shall recover, with no damage, from a short across the output for an indefinite period of time.

Internal Over temperature Protection

The PLB customer LED driver series is equipped with internal temperature sensor on the primary power train. Failure to stay within the convection power rating will result in the power supply reducing the available current (fold back) below the programmed amount. The main output current will be restored to the programmed value when the temperature of the built-in temperature sensor cools adequately.

Output Open Load Protection

When the LED load is removed, the output voltage of the PLB customer LED driver series is typically limited to 1.3 times the maximum output voltage of each model.

Protection on 0-10V Dimming Wires

0-10V dimming is also protected from mis-wiring of AC to 0-10V dimming for all nominal AC input voltage.

Low Profile (0.72" H x 0.72" W), Programmable, Constant Current Class 2 LED Driver with 0-10 V Dimming

8 - 0-10 V DIMMING

The PLB50/30/15 series operate only with 0-10V dimmers that sink current. They are not designed to operate with 0-10V control systems that source current, as used in theatrical/entertainment systems. Developed in the 1980's, the 0-10V sinking current control method is adopted by the International Electrotechnical Commission (IEC) as part of its IEC Standard 60929 Annex E.

The method to dim the output current of the driver is done via the +Dim/-Dim Signal pins. The +Dim/-Dim Signal pins respond to a 0 to 10 V signal, delivering 1% to 100% of the output current based on rated current for each model. A pull-up resistor is included internal to the driver. When the +Dim wire (purple) is short circuited to the -Dim wire (grey) or to the -LED wire (blue), the output current turns off.

If the +Dim input is > 10 V or open circuited, the output current is programmed to 100% of the rated current. When not used, the -Dim wire (grey) and to the +Dim wire (purple) can be individually capped or cut off. In this configuration, no dimming is possible and the driver delivers 100% of its rated output current.

The maximum source current (flowing from the driver to the 0-10V dimmer) supplied by the +Dim Signal pin is ≤ 1 mA. The tolerance of the output current while being dimmed shall be $\pm 8\%$ typical until down to 1.5 V.

In the PLB50/30/15 series, several 0-10V dimming profiles can be selected, such as a logarithmic profile, a non-linear profile with 1% minimum dimming and dim-to-off, and a non-linear profile with 10% minimum dimming and no dim-to-off. Furthermore, every point in the non-linear dimming profile can be programmed using the programming software.

By default, the non-linear profile with 1% minimum dimming (show in figure 2) is pre-loaded in the PLB50/30/15 series. In this non-linear 0-10V dimming profile, 10V to 9.0V=100% of the output current, <1.5V =1.

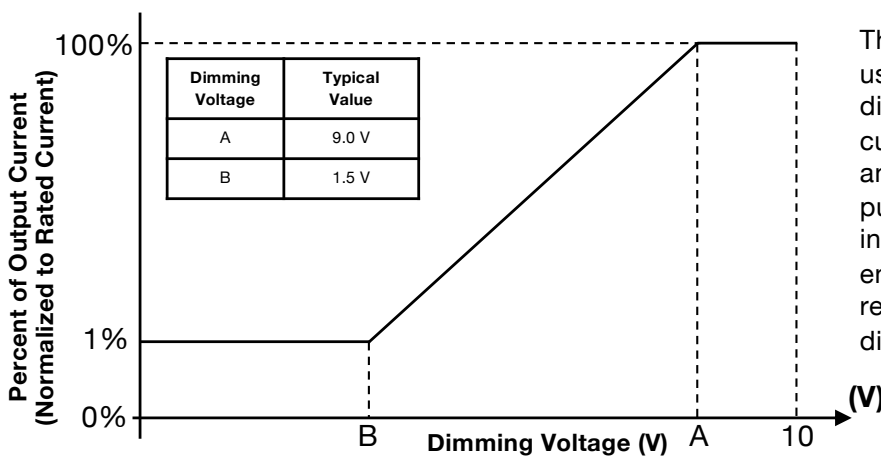


Figure 2

The non-linear curve is recommended when using standard in-wall 0-10 V logarithmic dimmers to avoid having insufficient source current available to pull the dimmer up to 10V and to account for the inability of the dimmer to pull below approximately 0.9V. In these type of installations, the modified transfer function will ensure 100% light output and dimming to 1%, regardless of the number of drivers on the 0-10V dimming line.

9 - COMPATIBLE 0-10 V DIMMERS

- Lutron, Nova series (part number NFTV)
- Lutron, Diva series (part number DVTV)
- Leviton, IllumaTech series (part number IP710-DL)

Low Profile (0.72" H x 0.72" W), Programmable, Constant Current Class 2 LED Driver with 0-10 V Dimming

9 - PROGRAMMING

The PLB50/30/15 series can be programmed by inserting the audio jack of the cable shown in figure 3 into the driver and by plugging the USB other end of the cable into a computer. **The driver does not need to be powered on during the programming process.**

When ordering the PLB50/30/15 series, please make sure you order a programming cable. The part number for the programming cable is "PROG-JACK-USB".

Programming is done by using the ERP GUI (Graphical User Interface), which enables the user to adjust output current from 100% to 50%.

Please note that, for each model, the **default output current setting is the minimum current.** For example, the default output current setting for the PLB50W-1200-38 is 600 mA.

Furthermore, when connecting the driver to a computer using the programming cable, you can access the driver's internal data log and read the following information: SKU, serial number, manufacturing lot code, hours of operation, firmware revision, and fault events: power failure, transients (short or surge), thermal events (i.e. number of times the case temperature has exceed the maximum case temperature of 90°C).

While programming drivers in a lot, the ERP GUI can interface with a label printer, which enables the user to add configuration labels to driver labels in order to highlight programmed output current. Listed below is the equipment needed to print labels.

Equipment	Part Number	Where to buy
Printer	TSC TC210	https://www.barcodefactory.com/tsc/printers/tc210/99-059a001-54lf
Ribbon	TSC Prem. Resin, 60mm x 110mm	https://www.barcodefactory.com/tsc/35-r060110-23cf
Labels	BAR-.81x.28-1-TT	https://www.barcodefactory.com/barcodefactory/labels/bar-.81x.28-1-tt

For more information, please refer to the GUI user's manual at:
<https://www.erp-power.com/our-products/programming-software/>



Figure 3

Low Profile (0.72" H x 0.72" W), Programmable, Constant Current Class 2 LED Driver with 0-10 V Dimming

10 - PREDICTED LIFETIME VERSUS CASE AND AMBIENT TEMPERATURE

Lifetime is defined by the measurement of the temperatures of all the electrolytic capacitors whose failure would affect light output under the nominal LED load and worst case AC line voltage. The graph in figure 4 are determined by the electrolytic capacitor with the shortest lifetime, among all electrolytic capacitors. It represents a worst case scenario in which the LED driver is powered 24 hours/day, 7 days/week. The lifetime of an electrolytic capacitor is measured when any of the following changes in performance are observed:

- 1) Capacitance changes more than 20% of initial value
- 2) Dissipation Factor ($\tan \delta$): 150% or less of initial specified value
- 3) Equivalent Series Resistance (ESR): 150% or less of initial specified value
- 4) Leakage current: less of initial specified value

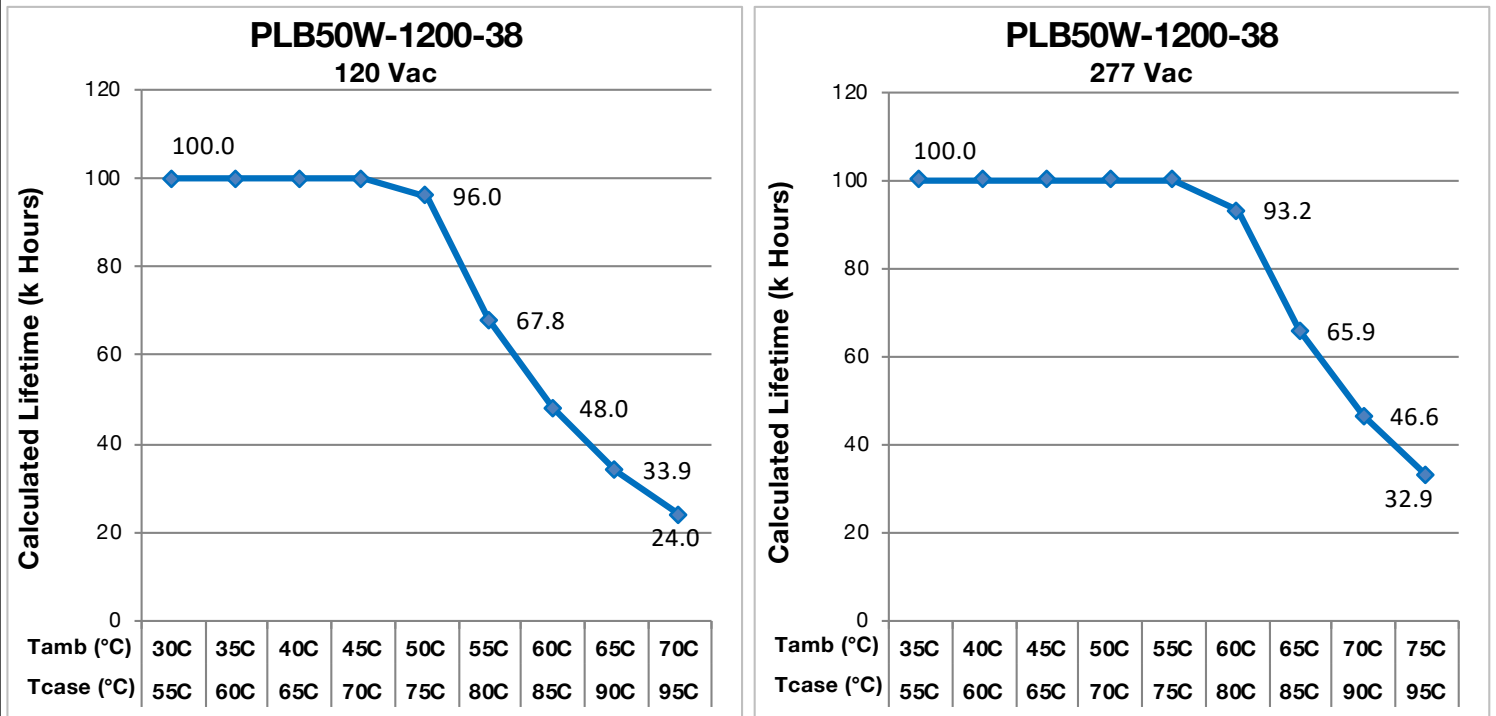


Figure 4

Notes:

- The above lifetime graphs were generated with the driver attached to a baseplate of dimensions 250 x 90 x 2 mm.
- The ambient temperature $T_{ambient}$ and the differential between $T_{ambient}$ and T_{case} mentioned in the above graphs are relevant only as long as both the driver and the light fixture are exposed to the same ambient room temperature. If the LED driver is housed in an enclosure or covered by insulation material, then the ambient room temperature is no longer valid. In this situation, please refer only to the case temperature T_{case} .
- It should be noted the graph "Lifetime vs. Ambient Temperature" may have an error induced in the final application if the mounting has restricted convection flow around the case. For applications where this is evident, the actual case temperature measured at the T_c point in the application should be used for reliability calculations.

Low Profile (0.72" H x 0.72" W), Programmable, Constant Current Class 2 LED Driver with 0-10 V Dimming

11 – EFFICIENCY VERSUS LOAD

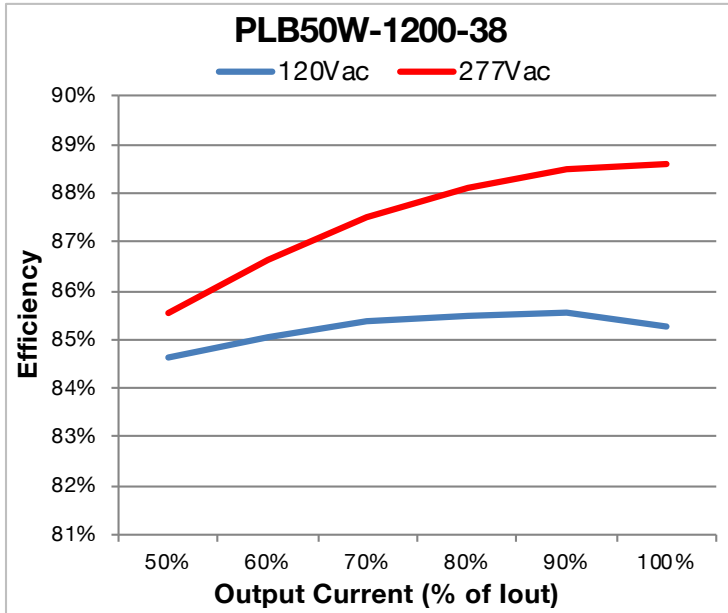


Figure 5

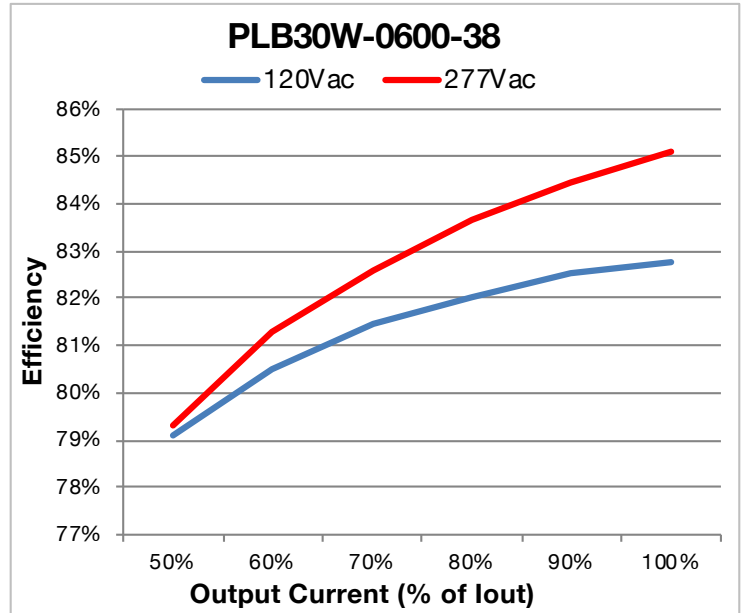


Figure 6

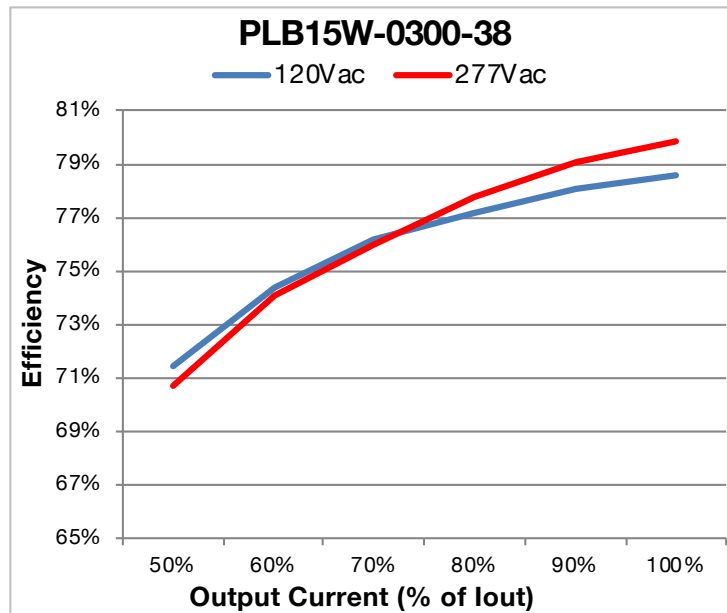


Figure 7

Low Profile (0.72" H x 0.72" W), Programmable, Constant Current Class 2 LED Driver with 0-10 V Dimming

12 – POWER FACTOR VERSUS LOAD

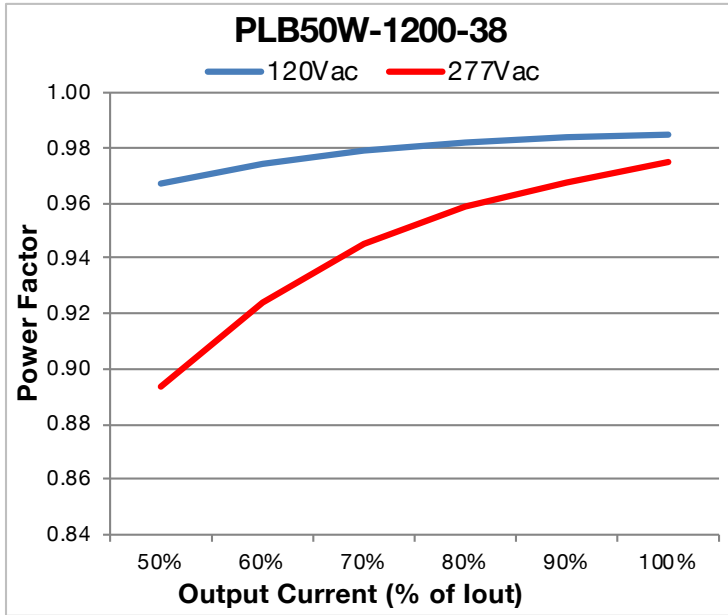


Figure 8

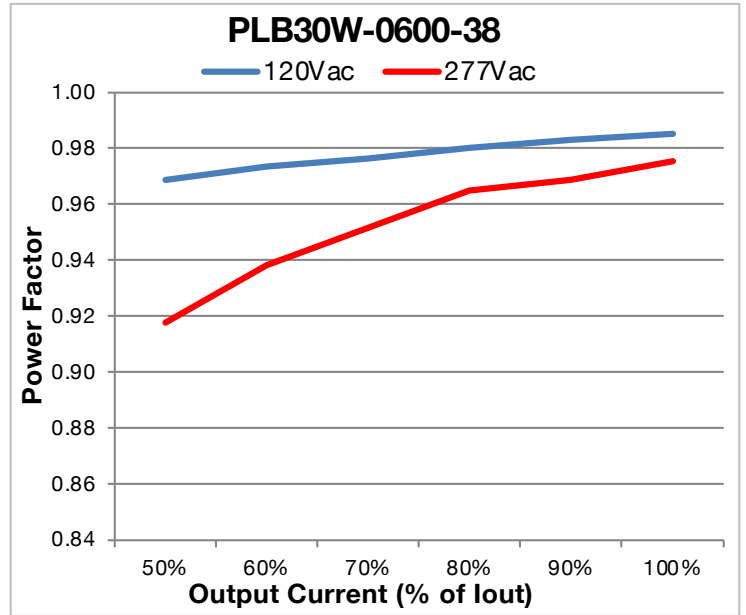


Figure 9

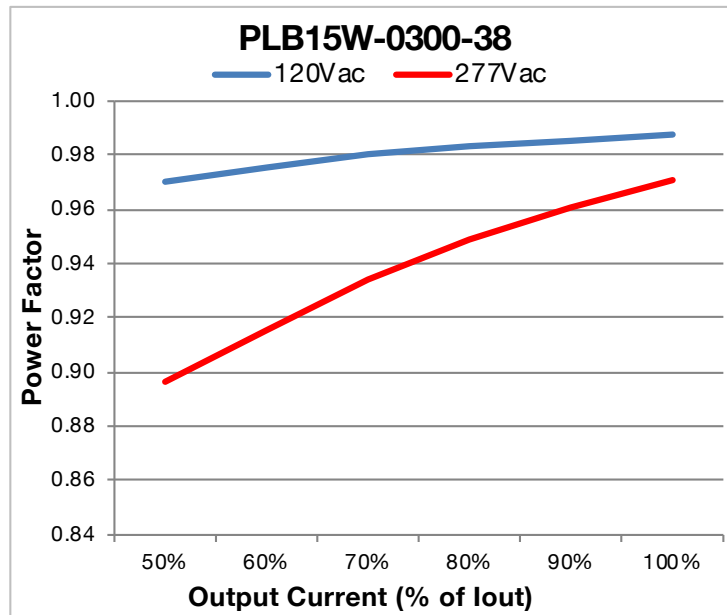


Figure 10

Low Profile (0.72" H x 0.72" W), Programmable, Constant Current Class 2 LED Driver with 0-10 V Dimming

13 – THD VERSUS LOAD

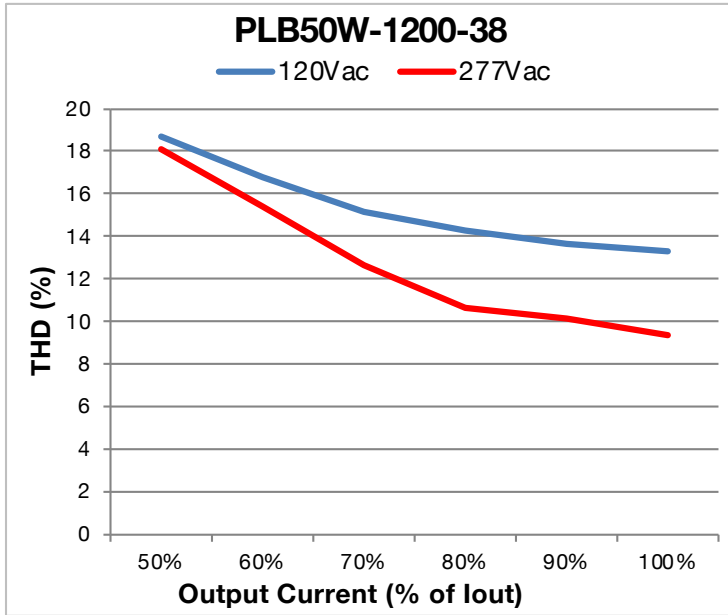


Figure 11

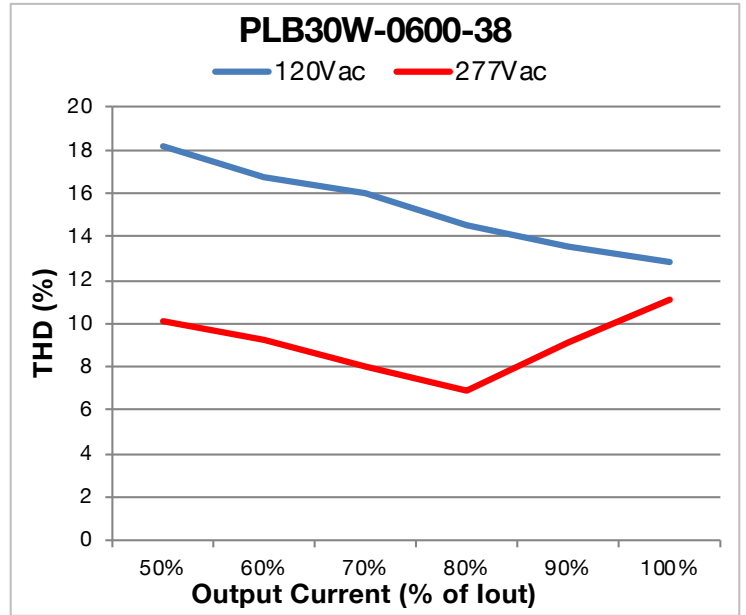


Figure 12

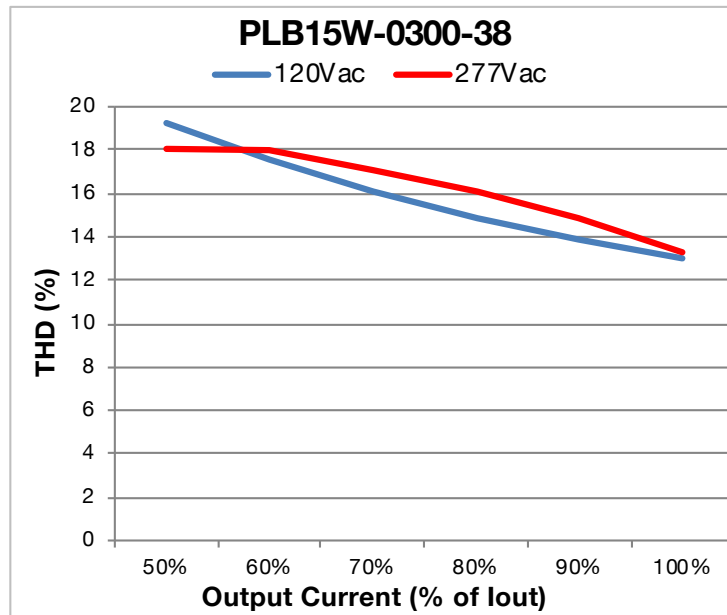


Figure 13

Low Profile (0.72" H x 0.72" W), Programmable, Constant Current Class 2 LED Driver with 0-10 V Dimming

14 - MECHANICAL DETAILS

- **Packaging:** Aluminum case
- **I/O Connections:** 18 AWG on input and output leads, 22 AWG on 0-10V dimming wires, 105°C rated, stranded, stripped by approximately 9.5 mm, and tinned. All the wires, on both input and output, have a 300 V insulation rating.
- **Wire Length:**
 - AC Neutral (White): 152 mm (6 inches)
 - AC Phase (Black): 203 mm (8 inches)
 - LED Output (+ Red): 203 mm (8 inches)
 - LED Output (- Blue): 152 mm (6 inches)
 - + Dim (Purple): 457 mm (18 inches)
 - - Dim (Grey): 508 mm (20 inches)
- **Ingress Protection:** IP20 rated
- **Mounting Instructions:** The PLB driver case must be secured on a flat surface through the two mounting tabs, shown here below in the case outline drawings.

15 - OUTLINE DRAWINGS (MODELS WITH FLYING LEADS)

Dimensions: L 198.7 * W 18.25 * H 18.25 mm (L 7.82 * W 0.72 * H 0.72 in.)

Volume:

Weight:

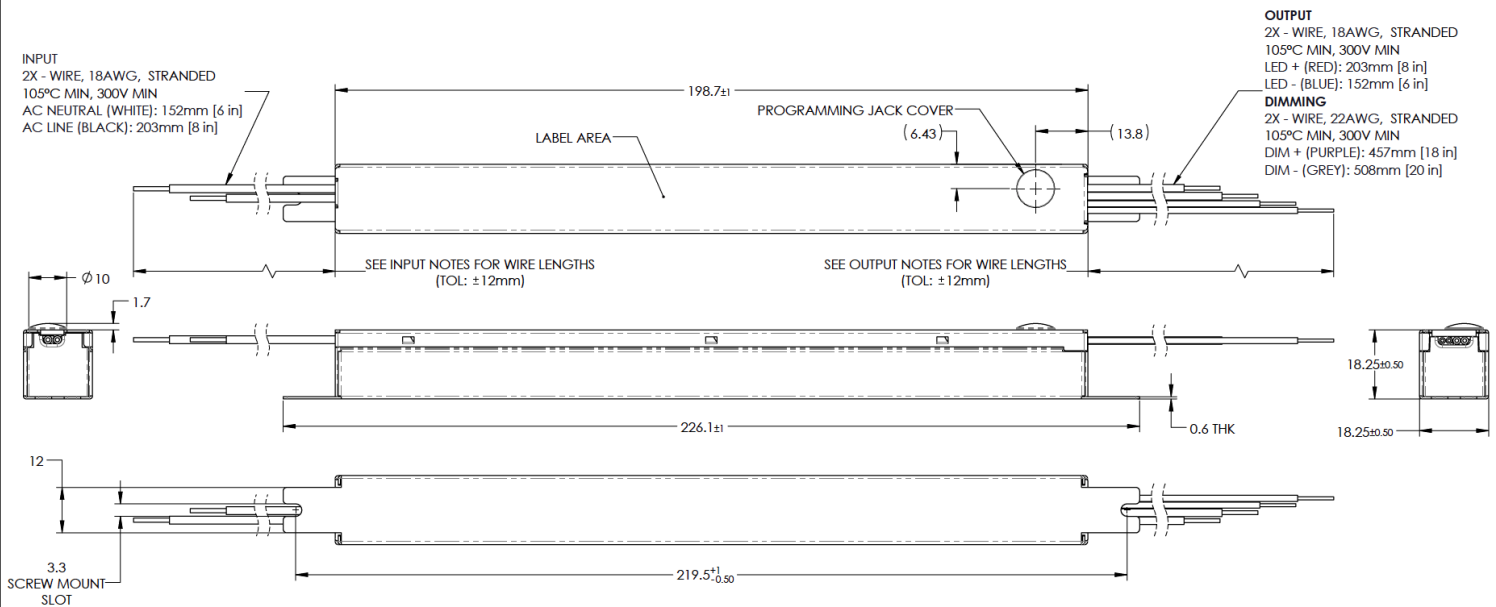


Figure 14

Low Profile (0.72" H x 0.72" W), Programmable, Constant Current Class 2 LED Driver with 0-10 V Dimming

16 - LABELING

The PLB50W-1200-38 is used in figure 15 as an example to illustrate a typical label.

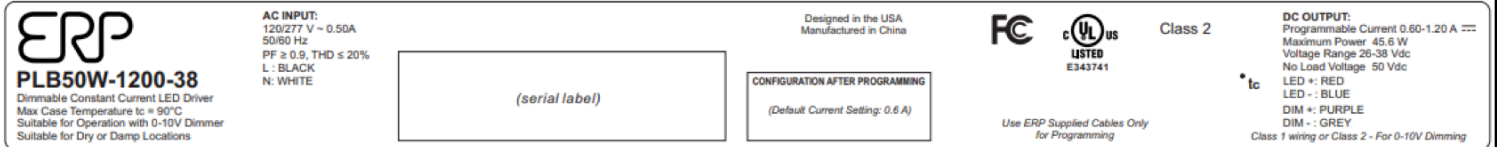


Figure 15

