

# ADVANCE

by @ignify

## LED Driver

### Xitanium

XI020C056V054BST3



The Advance Xitanium range of linear LED drivers is designed to provide OEMs with ultimate flexibility. These models are compatible with standard 0-10V dimming systems to deliver reliably smooth dimming performance down to a minimum of 1%. Enabled with SimpleSet technology, these drivers offer the needed flexibility and performance for the application with precise tuning of drive currents, selectable dimming curves and adjustable minimum dimming levels. With wide operating windows, slim profile and simple current adjustability, the drivers make it easy for luminaire manufacturers to design linear fixtures with desired lumen levels to suit the application.


#### Specifications

Input Voltage (Vac)	Output Power (W)	Output Voltage (V)	Output Current (A)	Efficiency @ Max Load and 75°C Case	Max Case Temp. (°C)	Input Current (A)	Max. Input Power (W)	THD @ Max Load (%)	Power Factor @ Max Load	Surge Protect. (Ring Wave, KV)	Envir. Protect. Rating	Dim.	Dimming Range (with specified dimmers)	Minimum Output Current (A)	Other Comments
120	20	10-54	0.1 - 0.56	86.0%	Life-75°C	0.2	24.8	<10%	>0.95	2.5	UL damp & dry	0-10V Analog Class 1 or Class 2 Wiring	1% ~ 100%	0.001	Dimming source current: 150 µA
277				87.0%	UL-80°C	0.09		<15%							

#### Enclosure

	In. (mm)
Case Length	11.02 (279.8)
Case Width	1.16 (29.5)
Case Height	1.00 (25.4)
Mounting Length	10.63 (270)
Overall Length	11.02 (279.8)

#### Wiring Diagram

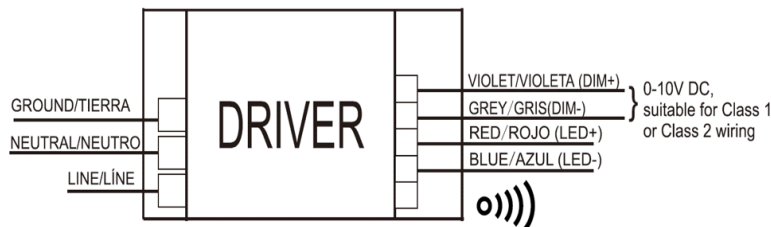


#### WARNING:

Install in accordance with National and Local Electrical Codes/Desenergizar el equipo antes de cambiar el sistema.  
Use 18 AWG Solid Copper Wire Rated  $\geq 90^{\circ}\text{C}$ /Utilice alambre de cobre calibre 18 AWG de clase  $\geq 90^{\circ}\text{C}$ .  
Strip Wire 3/8"/Pelar el cable 1cm.  
Clase Térmica  $130^{\circ}\text{C}$

#### GROUNDING/ATERRIZAR:

Driver case must be grounded/Conecte la caja del controlador a tierra.

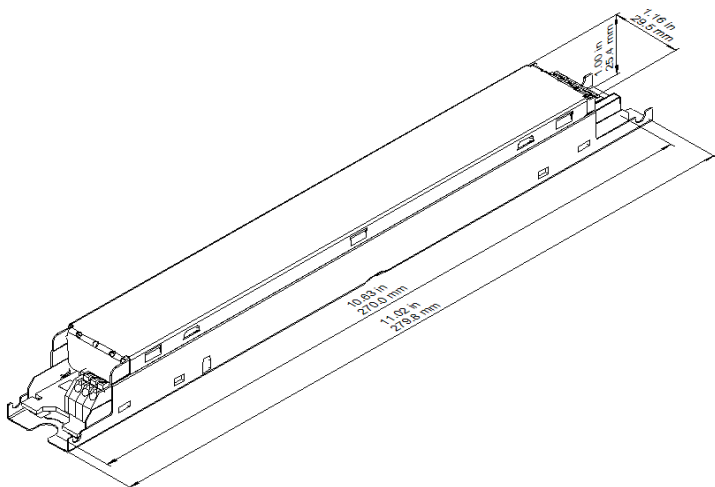

# Xitanium XI020C056V054BST3

20W 0.1-0.56A 54V 0-10V INT (1% dim) with SimpleSet

## Features

- 50,000+ hour lifetime<sup>1</sup>
- SimpleSet programmable
- Large operating window
- 1% minimum dim level

## Benefits

- Slim profile housing enables easy design-in with excellent thermal performance
- Enables simple, fast, flexible application-specific configurations
- Enables fixture designs with comprehensive application coverage for various loads and lumen levels

## Application

- Indoor linear applications such as troffers and pendants
- Office
- Education
- Healthcare
- Retail
- Big box stores

## Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.

## Product Data

Order Information	
Full Product Code	XI020C056V054BST3 (Mid-Pack, 18pcs/Box), 12NC:929002703813
Line Frequency	50/60Hz
Min. Mains Voltage Operational	108 Vac
Max. Mains Voltage Operational	305 Vac
Output Information	
Maximum Open Circuit Voltage	<=60Vdc (Class 2 output)
Output Current Ripple (ripple = peak to average / average)	15% max @ max Iout 4% max @ frequency range 60Hz-3KHz
Output Current Tolerance (in the performance window)	<5%
Flicker	Pst:≤0.5, SVM:≤1.0
Protections	Short Circuit and Open Circuit Protection for LED + and LED-, mis-wiring protection for 0-10V interface
Features	
0-10V Dimming	150µA source current from driver. See dim curve for detail.
AOC (Adjustable Output Current)	0.1A-0.56A via SimpleSet programming (refer to graph and notes below)
Additional SimpleSet Configurable Features	Adjustable minimum dimming level, Dimming curve selection (linear or logarithmic), Adjustable output level, Adjustable output min, OEM write protection
Environment & Approbation	
Operating Ambient Temp. Range	-20°C to +50°C
Max Case Temperature (Tcase)	75°C for Life / 80°C for UL
Agency Approbations	UL8750, CSA-C22.2 No. 250.13, NOM, Class P (ETL, CSA, UL)
Electromagnetic Compliance	FCC Title 47 Part 15 Class A
Audible Noise	<24dB Class A
Weight	0.44 Lbs / 0.2 kgs

1. Advance Xitanium LED drivers are manufactured to engineering standards correlating to a designed and average life expectancy of 50,000 hours of operation at maximum rated case temperature. Minimum 90% survivals based on MTBF modeling.

# Xitanium XI020C056V054BST3

20W 0.1–0.56A 54V 0–10V INT (1% dim) with SimpleSet

## Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.

## 0–10V Dimming Curve


Dimming source current from the driver: 150µA (@ 0<Vdim<8V)

Minimum dim level: 1% of Iout (minimum 1mA)

Maximum output voltage on the dimming wires: 12V

## Approved Dimmer List


Manufacturer	Manufacturer Part Number
Lutron	Visit <a href="http://www.lutron.com/advance">www.lutron.com/advance</a> for a list of dimmers (Mark VII) that will work with this driver
Leviton	IllumaTech IP7 series
Advance	Sunrise – SR1200ZTUNV

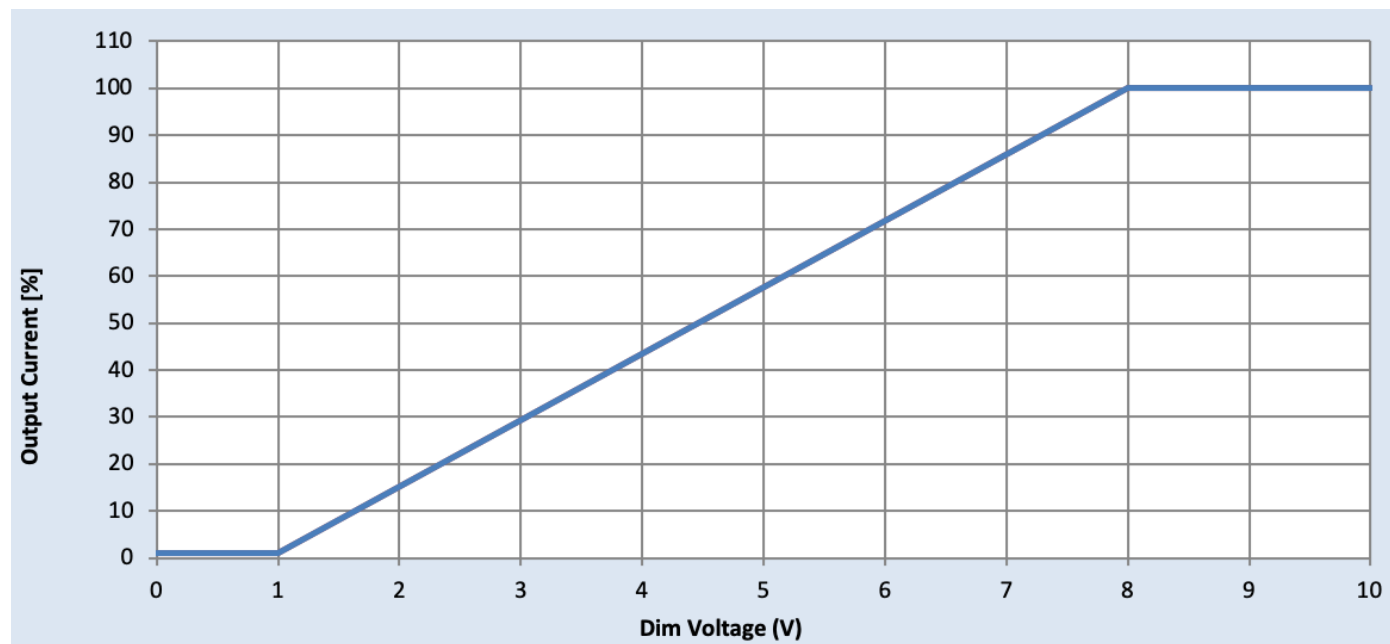

## Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.

### Driver Output Window

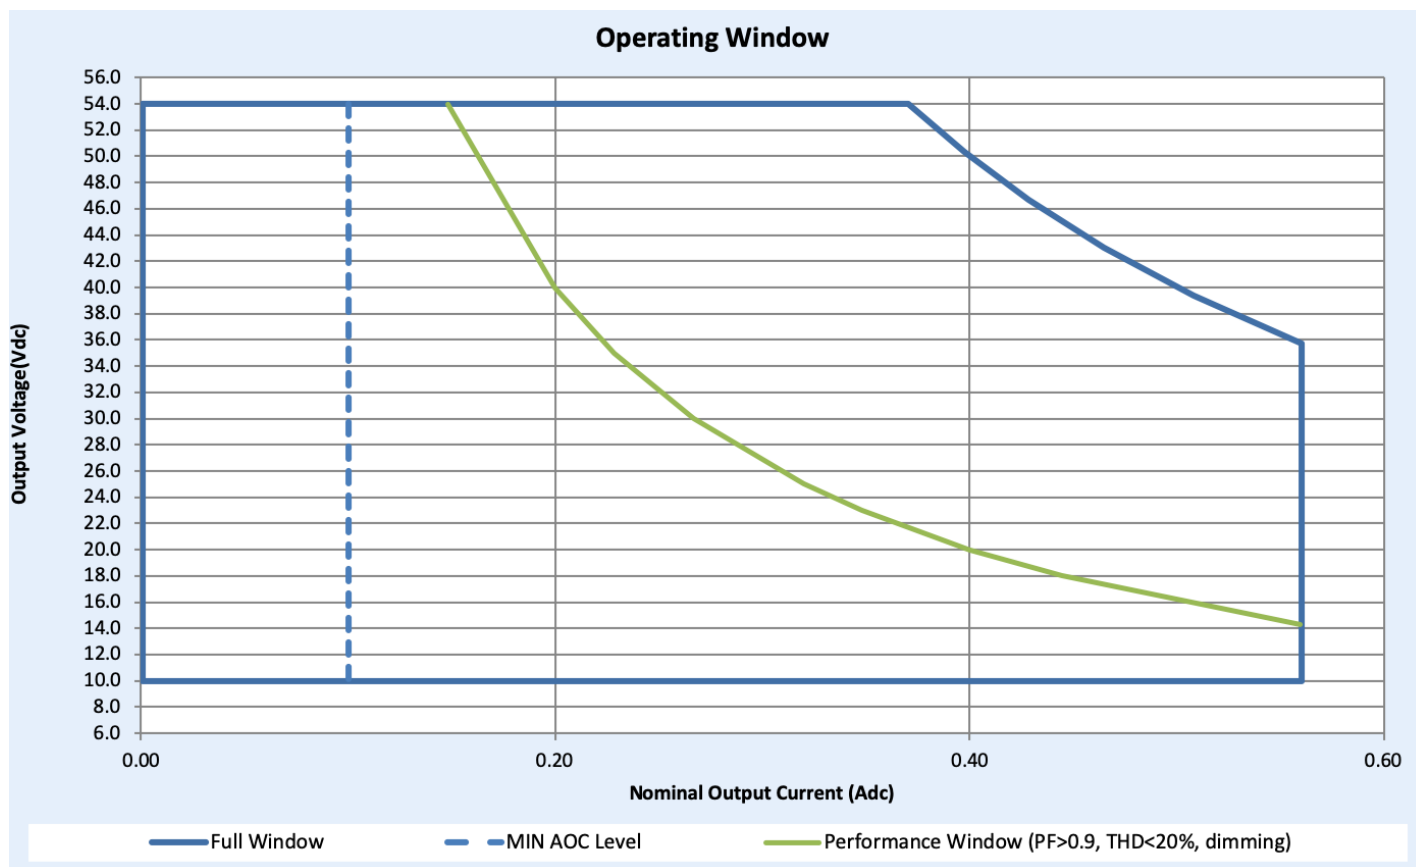


### Notes

1. Factory default output current is 0.56A.
2. For dimming to a minimum level of 1% the output current setting through AOC should be  $\geq 0.1A$ .

Electrical Specifications


All the specifications are typical and at 25°C Tcase unless specified otherwise.

Output Current Vs. Driver Case Temperature

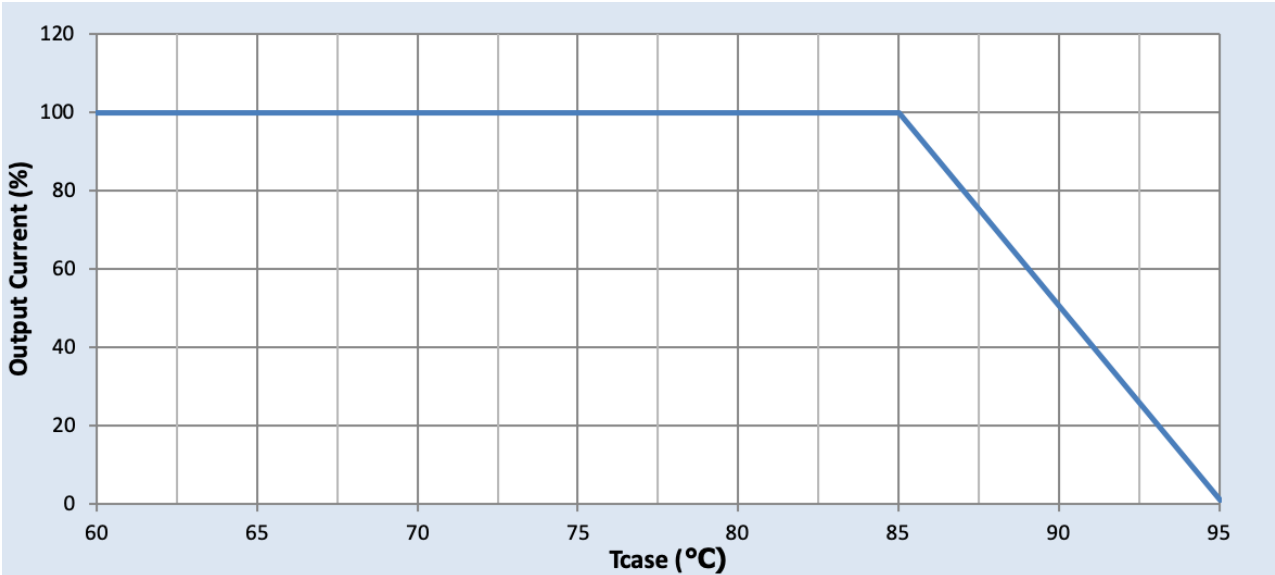

Note: There is ±5°C tolerance on the driver case temperature.


Driver Lifetime vs. Driver Case Temperature

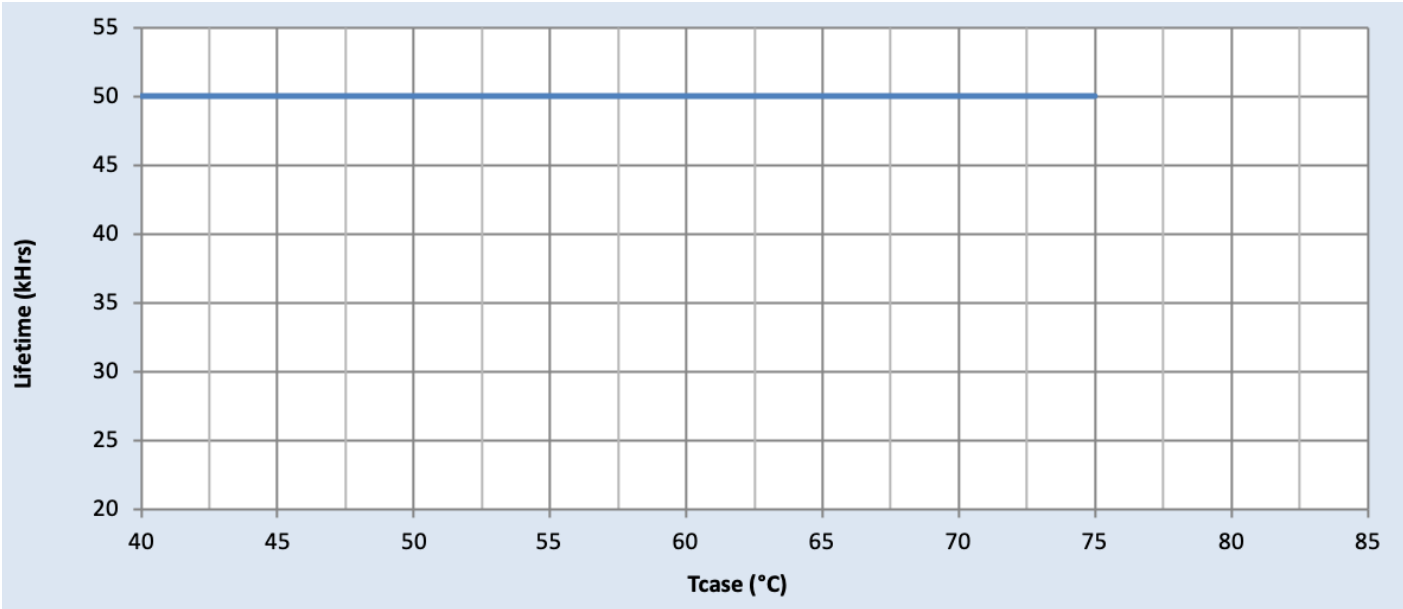


Performance Characteristics

Based on measurements on a typical sample at 75°C case. The accuracy of the measurements is within the tolerance of the measurement instruments.

Efficiency Vs. Output Voltage at 120Vac

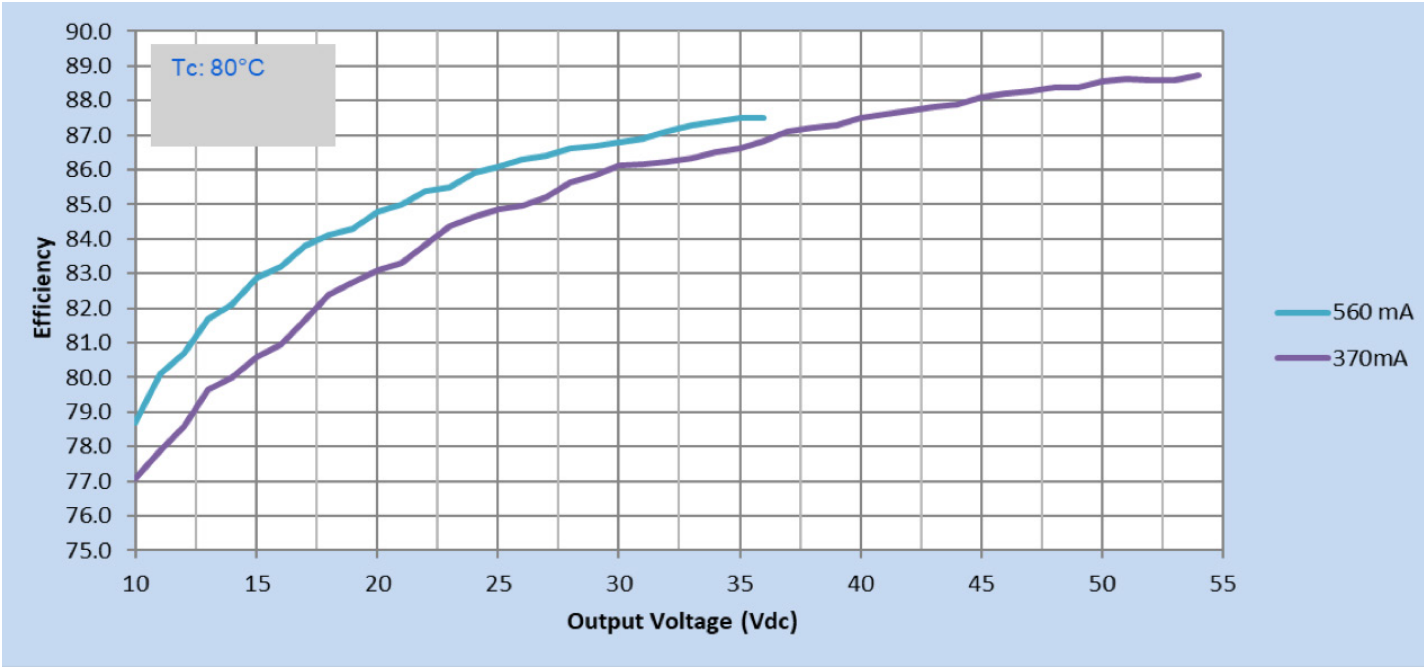


Efficiency Vs. Output Voltage at 277Vac

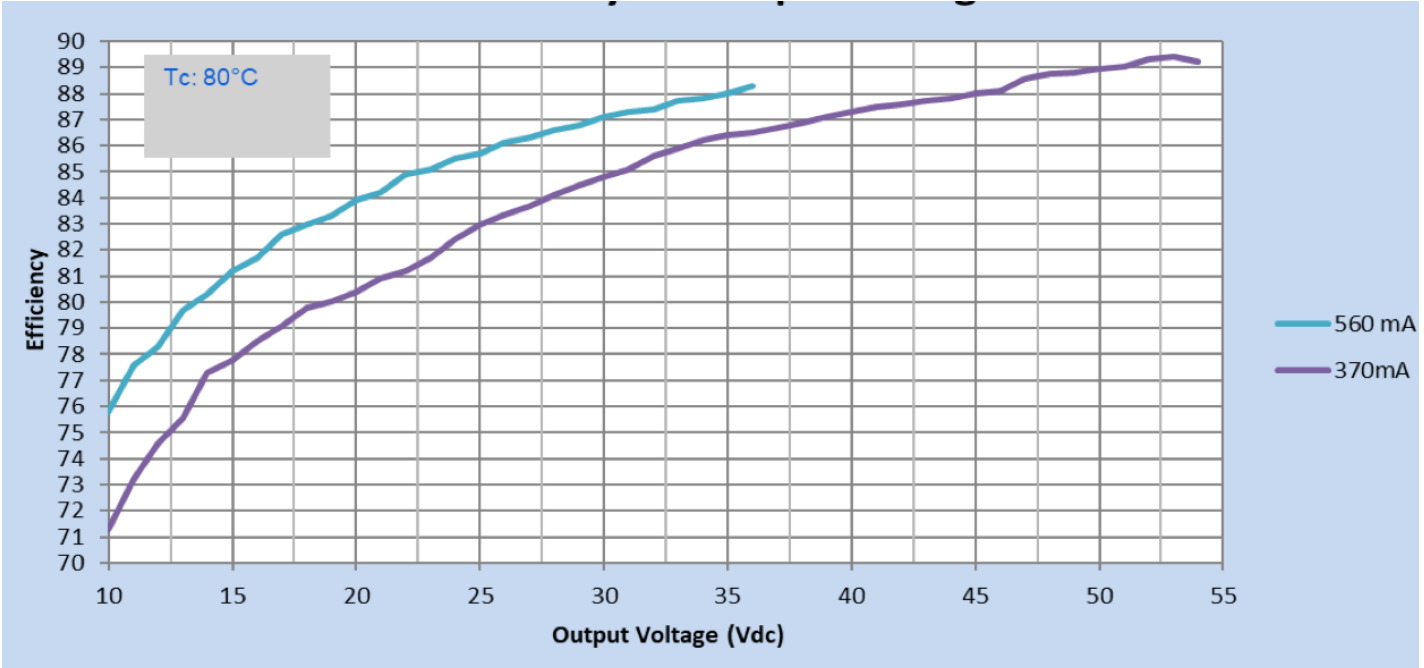


Performance Characteristics

Based on measurements on a typical sample at 70°C case. The accuracy of the measurements is within the tolerance of the measurement instruments.

Power Factor Vs. Output Power

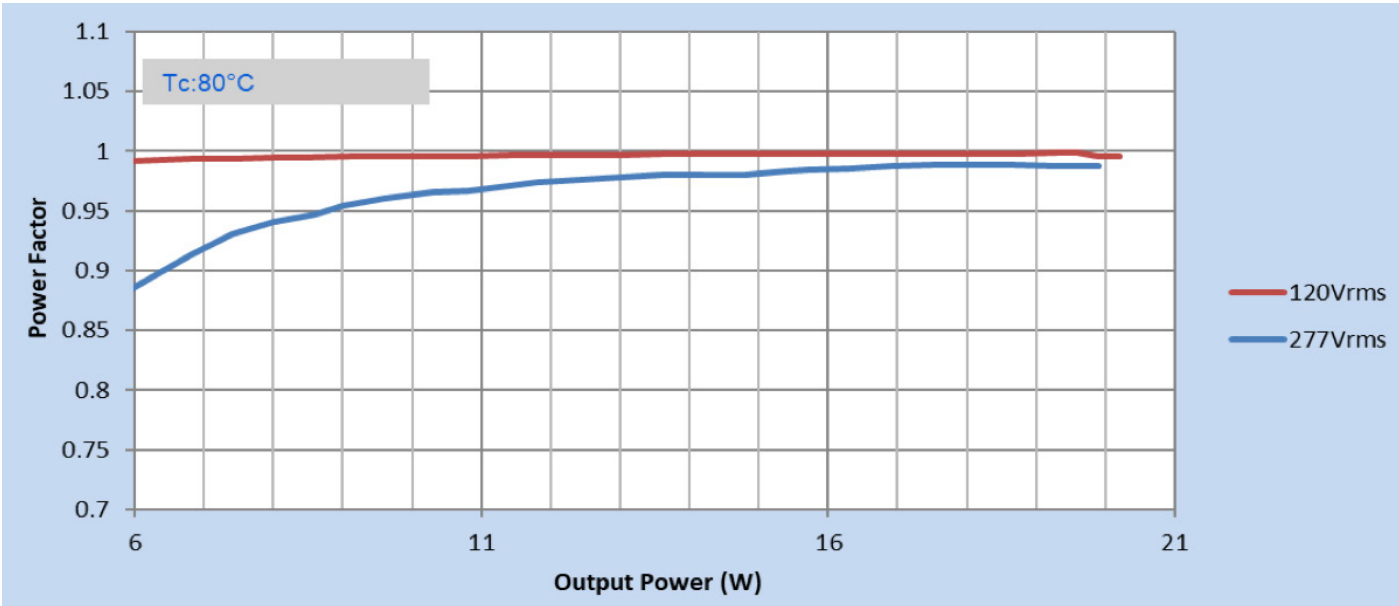

Total Harmonic Distortion (THD) Vs. Output Power

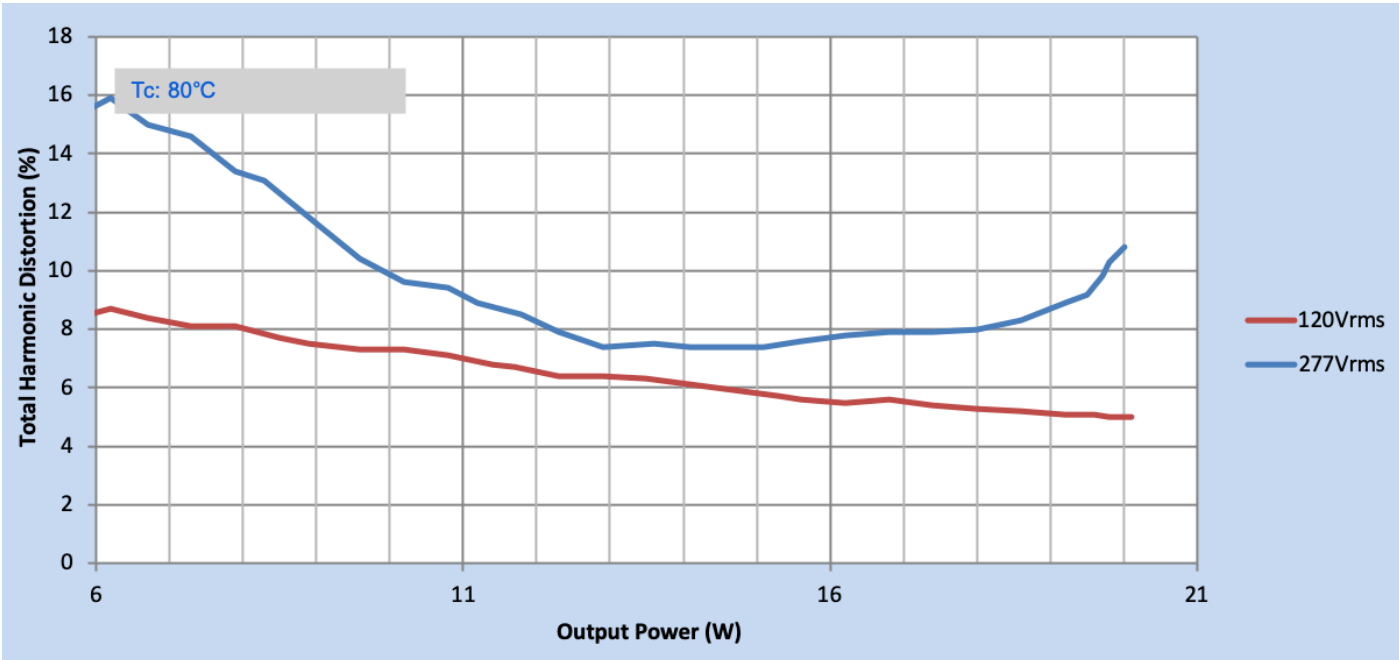


Xitanium

XI020C056V054BST3

20W 0.1-0.56A 54V 0-10V INT (1% dim) with SimpleSet

Inrush Current Info

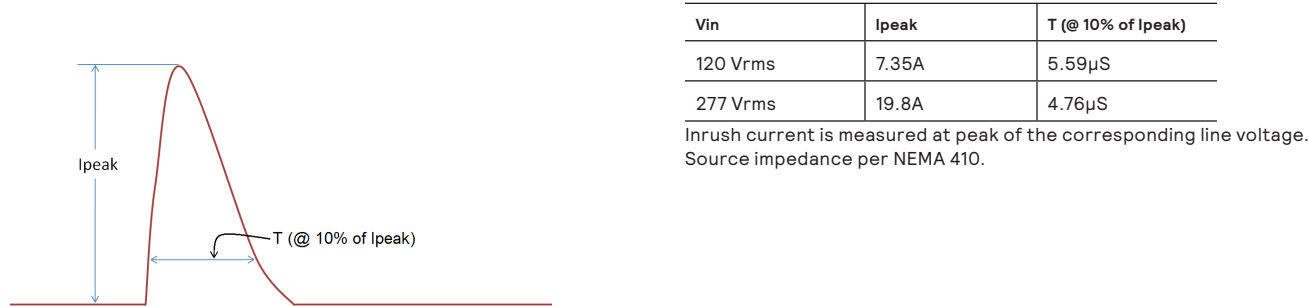

Lightning Surge Info

ANSI Surge Type	Differential Mode (L-N)	Common Mode (L-G, N-G, L&N-G)
100kHz Ring Wave (w/t 30 $\Omega$ )	>2.5KV	>2.5KV

Isolation

Isolation	Input	Output	0-10V	Enclosure
Input	-	2xU+1kV	2xU+1kV	2xU+1kV
Output	2xU+1kV	-	2xU+1kV	2xU+1kV
0-10V	2xU+1kV	2xU+1kV	-	2xU+1kV
Enclosure	2xU+1kV	2xU+1kV	2xU+1kV	-

U = Max input voltage

