



Fortimo LED strip performance LV5 modules comes with a multitude of performance and product advancements that include higher efficacy, higher lumen output, increased lumen maintenance, additional mechanical designs and additional CCT and CRI options when compared to the previous generation (LV4).

With these advancements, the Fortimo LED strip module is the ideal choice for high-performance high-quality luminaires for direct and indirect lighting in offices, banks, schools, public buildings, supermarkets and other applications to replace high energy efficiency T5 fluorescent lighting.

Commercial Product Name	12NC
FO Strip PR 44in 4400lm 830 LV5	929001786913
FO Strip PR 44in 4400lm 835 LV5	929001787013
FO Strip PR 44in 4400lm 840 LV5	929001787113
FO Strip PR 44in 4400lm 850 LV5	929001787213

Features

- High flux density of up to 2000 lm per foot
- Narrow width of only 20mm
- Can be split into two modules⁴
- High lumen maintenance (TM21) of L90 36,000 hours
- 3 SDCM color consistency
- Tight Vf binning enables longer daisy chaining

Benefits

- High energy efficacy and long lifetime¹ provide optimized total cost of ownership
- Slim width and 4ft length provide excellent design-in options and assembly
- High quality and warm color temperatures of light enables new application areas like hospitality
- 5-year limited system warranty with Advance Xitanium LED drivers²
- Specifications enable DLC Premium category³

Applications

- Retail
- Hospitality
- Office

1. Average rated life is based on engineering data testing and probability analysis. The hours are at the B50, L70 point – 50,000 hours life with 70% lumen maintenance at Tc point.
 2. View limited warranty at www.signify.com/warranties for details and restrictions.
 3. Fortimo LED strip LV5 is not a DesignLights Consortium™ (DLC) qualified product. It is an OEM component that meets certain performance specifications that are geared toward meeting DLC Standard Tier (v4.0) in a fully assembled fixture. The customer is liable for proper design, manufacturing, testing and qualification according to DLC requirements.
 4. Only two LED Modules can be produced from one full-length variable length module as wire trap connectors are only located on the last module section on each end of the full-length module. The method for separation of the variable length LED modules can be found in the Advance Fortimo LED Linear Module Design-In guide located here: [https://www.na.mytechnology.portal.signify.com/dam/jcr:e4de1316-8ca1-4f08-ad38-ef2cdd5e52bb/Advance%20Fortimo%20LED%20Linear%20Modules%20Design-in%20Guide%20\(PLT-1590DG\).pdf](https://www.na.mytechnology.portal.signify.com/dam/jcr:e4de1316-8ca1-4f08-ad38-ef2cdd5e52bb/Advance%20Fortimo%20LED%20Linear%20Modules%20Design-in%20Guide%20(PLT-1590DG).pdf)

Fortimo LED Strip Performance LV5 44in4400lm

Drive Currents

Parameter at I _{life}	Nominal [*]	Life ^{**}	Max ^{***}	Unit
FO Strip PR 44in 4400lm 8xx LV5	616	1300	1400	mA

Module Temperatures

Parameter at I _{life}	Nominal [*]	Life ^{**}	Max ^{***}	Unit
T _c (case temperature at T _c point)	45	85	95	°C

* Nominal value at which typical performance is specified.


** Value at which life time is specified.

*** Maximum value for safe operation, do not operate above this value.

Optical Characteristics – Table per CCT

FO Strip PR 44in 4400lm 830 LV5				
Parameter	Min. (@ Inom)	Typ. (@ Inom)	Max. (@ Inom)	Unit
Luminous Flux	3900	4220	4540	Lm
Module Efficiency	154	171	188	Lm/W
Correlated Color Temperature (CCT) Target		3000		K
Color coordinates (CIEx, CIEy)		(0.433, 0.401)		-
Color consistency			3	SDCM
CRI	80			-

Operation point	T _c	lm	lm/W
490 mA	25 °C	3490	179
	45 °C	3395	175
	85 °C	3155	165
616 mA	25 °C	4330	174
	45 °C	4215	171
	85 °C	3915	161
1300 mA	25 °C	8625	153
	45 °C	8380	150
	85 °C	7775	141

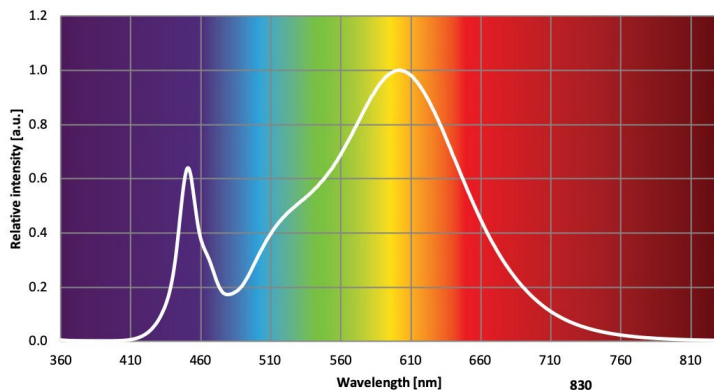


R9>0, Measurement precision ± 5% for the flux data, ± 1.5% for the Vf data, ± 1.5% for the power data, and ± 6% for the efficacy data. Measurement precision for color coordinates ± 0.005. Measurement precision for CRI ± 1.5.

Fortimo LED Strip Performance LV5 44in4400lm

Optical Characteristics – Table per CCT

FO Strip PR 44in 4400lm 835 LV5				
Parameter	Min. (@ Inom)	Typ. (@ Inom)	Max. (@ Inom)	Unit
Luminous Flux	4020	4360	4680	Lm
Module Efficiency	158	176	194	Lm/W
Correlated Color Temperature (CCT) Target		3500		K
Color coordinates (CIEx, CIEy)		(0.407, 0.391)		-
Color consistency			3	SDCM
CRI	80			-

Operation point	Tc	lm	lm/W
490 mA	25 °C	3595	184
	45 °C	3500	180
	85 °C	3250	170
616 mA	25 °C	4470	179
	45 °C	4345	175
	85 °C	4040	165
1300 mA	25 °C	8895	157
	45 °C	8640	154
	85 °C	8015	145

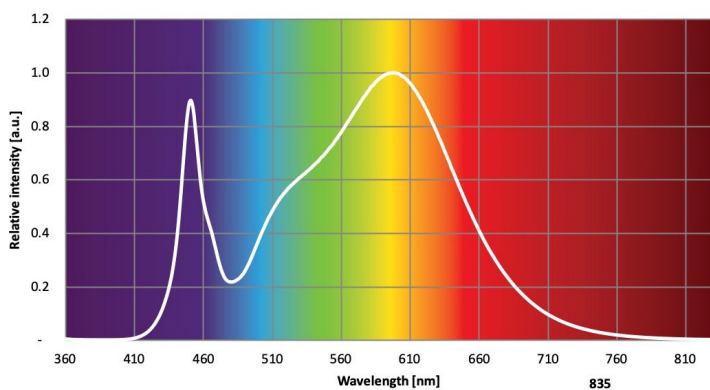


R9 > 0, Measurement precision $\pm 5\%$ for the flux data, $\pm 1.5\%$ for the Vf data, $\pm 1.5\%$ for the power data, and $\pm 6\%$ for the efficacy data. Measurement precision for color coordinates ± 0.005 . Measurement precision for CRI ± 1.5 .

Fortimo LED Strip Performance LV5 44in4400lm

Optical Characteristics – Table per CCT

FO Strip PR 44in 4400lm 840 LV5				
Parameter	Min. (@ Inom)	Typ. (@ Inom)	Max. (@ Inom)	Unit
Luminous Flux	4080	4400	4740	Lm
Module Efficiency	162	180	198	Lm/W
Correlated Color Temperature (CCT) Target		4000		K
Color coordinates (CIEx, CIEy)		(0.381, 0.378)		-
Color consistency			3	SDCM
CRI	80			-

Operation point	Tc	lm	lm/W
490 mA	25 °C	3625	189
	45 °C	3525	185
	85 °C	3280	174
616 mA	25°C	4505	184
	45 °C	4400	180
	85 °C	4070	170
1300 mA	25 °C	8965	162
	45°C	8715	158
	85 °C	8080	149

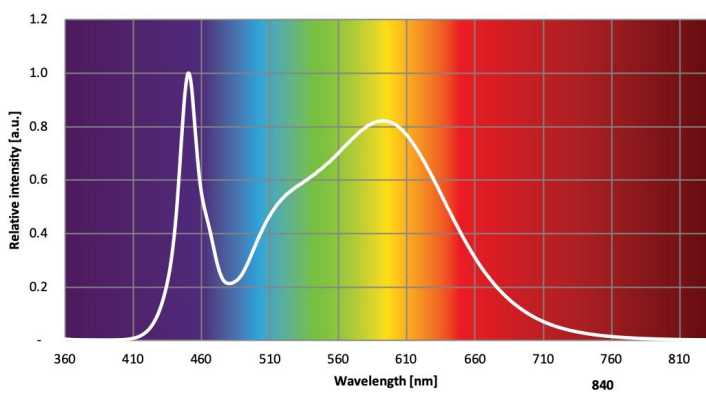


R9>0, Measurement precision ± 5% for the flux data, ± 1.5% for the Vf data, ± 1.5% for the power data, and ± 6% for the efficacy data. Measurement precision for color coordinates ± 0.005. Measurement precision for CRI ± 1.5.

Fortimo LED Strip Performance LV5 44in4400lm

Optical Characteristics – Table per CCT

FO Strip PR 44in 4400lm 850 LV5				
Parameter	Min. (@ Inom)	Typ. (@ Inom)	Max. (@ Inom)	Unit
Luminous Flux	4080	4400	4740	Lm
Module Efficiency	162	180	198	Lm/W
Correlated Color Temperature (CCT) Target		5000		K
Color coordinates (CIEx, CIEy)		(0.344, 0.354)		-
Color consistency			3	SDCM
CRI	80			-

Operation point	Tc	lm	lm/W
490 mA	25°C	3625	189
	45 °C	3525	185
	85 °C	3280	174
616 mA	25 °C	4505	184
	45 °C	4400	180
	85 °C	4070	170
1300 mA	25°C	8965	162
	45 °C	8715	158
	85°C	8080	149

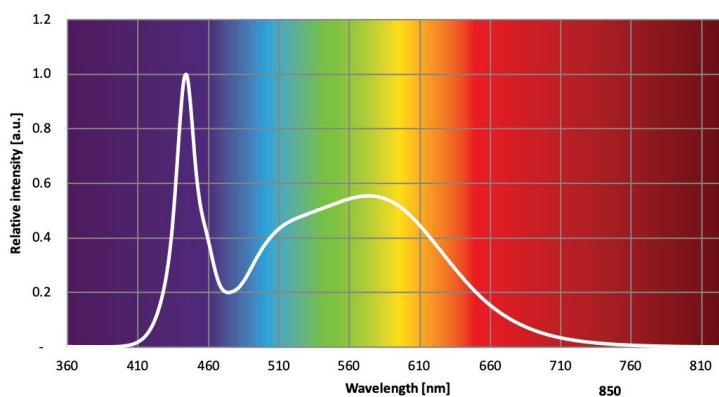

R9>0, Measurement precision ± 5% for the flux data, ± 1.5% for the Vf data, ± 1.5% for the power data, and ± 6% for the efficacy data. Measurement precision for color coordinates ± 0.005. Measurement precision for CRI ± 1.5.

Fortimo LED Strip Performance LV5 44in4400lm

Absolute Ratings

Parameter	Min.	Typ.	Max.	Unit
Current through the LED module (I-max)			1400	mA
Working voltage			44	V _{dc}
Isolation breakdown voltage	700			V _{dc}
Ambient Temperature	-20 ⁴			°C

1. There cannot be any ice/fog/mist on any part of the module surface during the application at -20°C.

System Chain Limits for Same Length Modules

Total length (in)	Total current limit (A)
96	0.88
114	0.6
192	0.44

Please review the design-in guide or contact the Design-in team for further information.

Application Information

Compliance and Approval

UL & cUL - UL8750

Environmental

RoHS / REACH

IP Rating	No IP rating
Overheating Protection	No protection
Luminaire Class	UL Class 2


Estimated Number of Full Thermal Product Cycles @ 25°C Ambient Temperature

Case Temperature T _c [°C]	Amount of Cycles
45	100,000
55	100,000
65	100,000
75	65,000
85	25,000

Fortimo LED Strip Performance LV5 44in4400lm

Beam Shape

The Fortimo LED strip generates a Lambertian beam shape, which is a pragmatic starting point for OEMs wishing to design secondary optics.

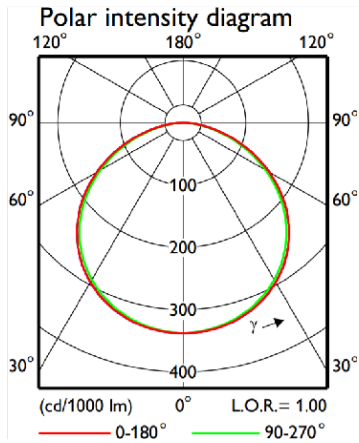

Electrical Characteristics

Parameter	Min	Typ	Max	Unit
Forward voltage; If = 616mA, Tc = 45°C	39.4	39.9	40.4	V
Thermal power; If = 616mA, Tc = 45°C		11.7		W


Wiring

Specification Item	Value	Unit	Condition
Input Wire Cross-Section	0.2...0.8	mm ²	Solid
	18...24	AWG	
	0.45...0.7	mm ²	Stranded
	20...22	AWG	
Input Wire Strip Length	4.5...5.5	mm	

Mechanical Characteristics

Specification Item	Min	Typ	Max	Unit
Length	1117.9	1118.4	1118.9	mm
Width	19.8	20.0	20.4	mm
Height Excl. Connector		2.3		mm
Height Incl. Connector		4.6		mm
Warpage			0.75	%


FO Strip PR 44in 4400lm xxx LV5

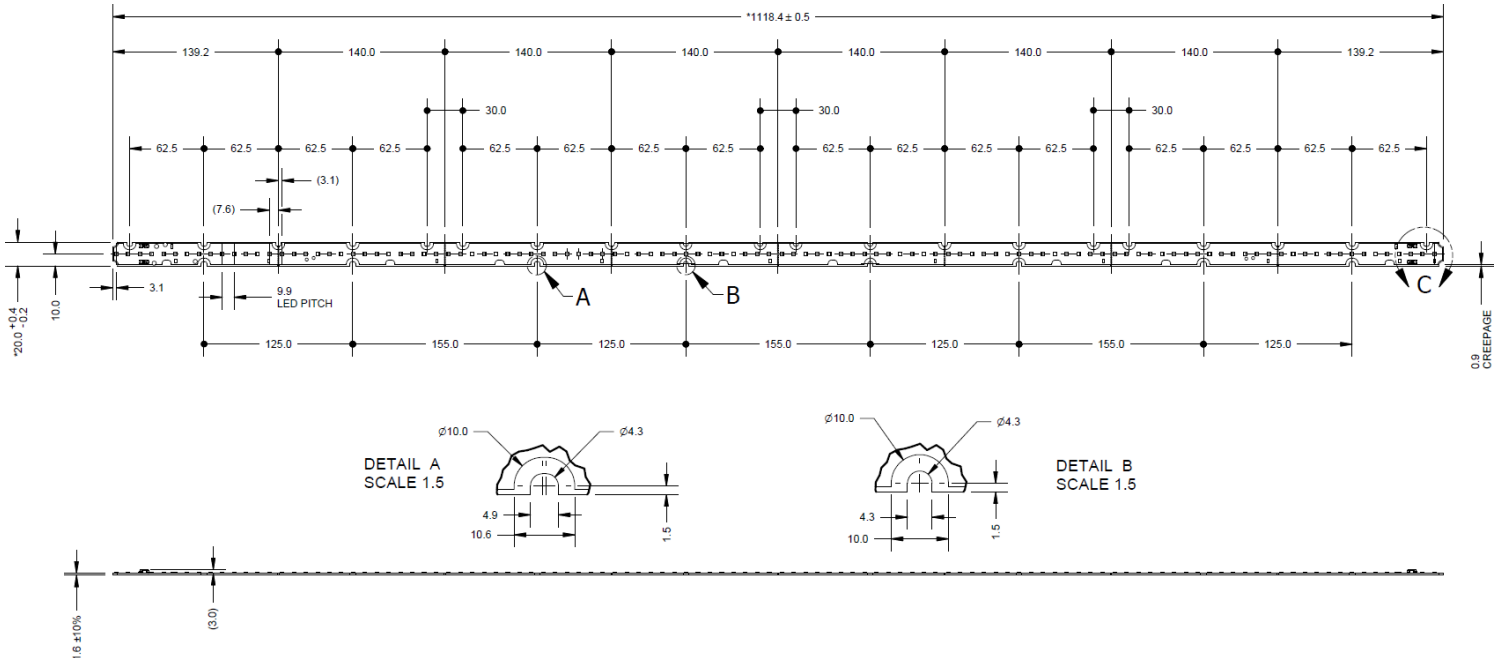

Fortimo LED Strip Performance LV5 44in4400lm


Tuning Information

Flux and Efficacy Vs. Current (at Nominal Temperature)

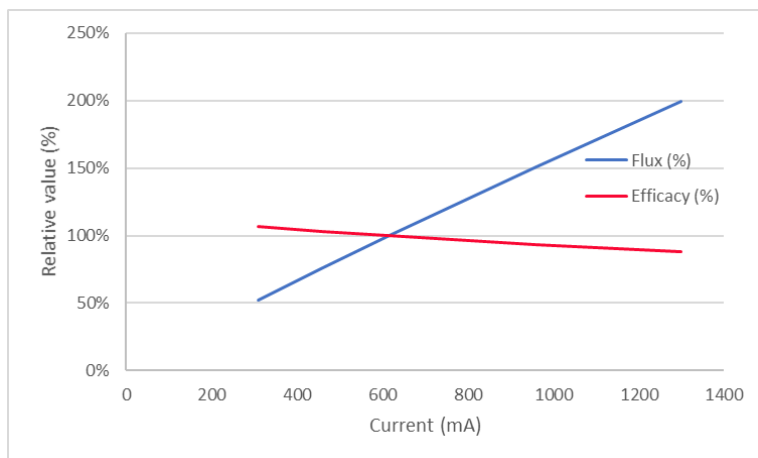

I [mA]	Flux [%]	Efficacy [%]
308	52%	107%
460	76%	103%
616	100%	100%
960	151%	94%
1300	199%	88%

Flux and Efficacy Vs. Tc

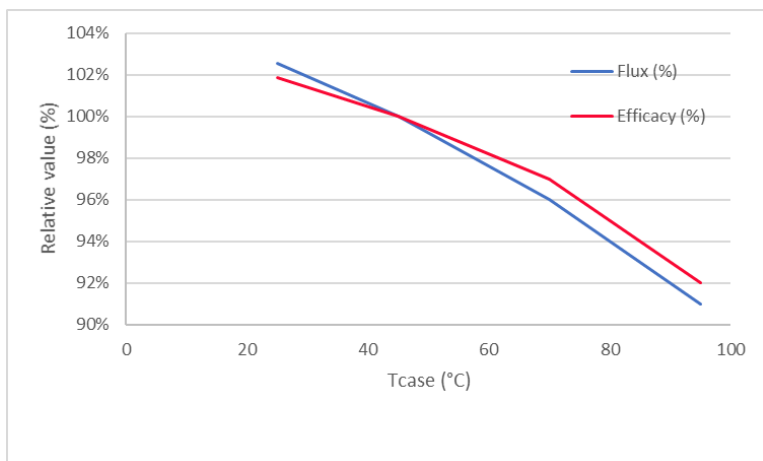

Tc [°C]	Flux [%]	Efficacy [%]
95	91%	92%
70	96%	97%
45	100%	100%
25	103%	102%

Fortimo LED Strip Performance LV5 44in4400lm

Lumen Maintenance Based on Theoretical TM21 Calculations

Operation point	Tc	L70	L80	L90
80% I-nom 490 mA	Tc-nom 25 °C	>50	>50	50
	Tc 45 °C	>50	>50	50
	Tc-life 85 °C	>50	>50	41
I-nom 616 mA	Tc-nom 25 °C	>50	>50	50
	Tc 45 °C	>50	>50	50
	Tc-life 85 °C	>50	>50	41
I-life 1300 mA	Tc-nom 25 °C	>50	>50	50
	Tc 45 °C	>50	>50	50
	Tc-life 85 °C	>50	>50	41

Application limited to indoor applications (office/hospitality/educational), indoor warehouse and light industry.

The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract.

