

Preliminary datasheet

This preliminary datasheet of the LUXEON IR ONYX is provided for information purposes only.

This datasheet has been drafted based on the best available data at the time of publication however Lumileds cannot guarantee any of the properties (for example but not restricted to: performance, characteristics, mechanical dimensions) in this preliminary datasheet will be representative for the final product. Additionally all other information in this preliminary datasheet for example but not restricted to bin definitions, packaging information and reflow soldering information may change before the release of the product.

Please contact your Lumileds Technical Solutions Manager or Sales contact for updates on the product characteristics.

This Lumileds Preliminary datasheet is **confidential** and should not be distributed without prior written approval of Lumileds



LUXEON IR ONYX

Industry leading broadband IR solution for spectroscopy applications

LUXEON IR ONYX brings a phosphor converted broadband IR emission of 600-1050nm at radiant power of 50mW, in an industry standard, small form factor of 2.7x2.0mm enabling miniaturization of spectroscopy applications like in machine vision, hand-held devices and healthcare equipment.



FEATURES AND BENEFITS

Radiometric power over 40mW IR (600-1050nm) to reduce exposure time

More than 80 μ W/nm over a broad range (750-1000nm)

2.7mm x 2.0mm package with a 2 pad configuration that is compatible with the industry common footprint.

Lumileds phosphor expertise resulting in robust, long life time phosphors.

Flat spectrum allows for ease of calibration

PRIMARY APPLICATIONS

Spectroscopy

Machine Vision

Healthcare

General Product Information

Product Test Conditions

LUXEON IR ONYX emitters are tested and binned with a 20ms monopulse of 350mA at a junction temperature, T_j , of 25°C.

Part Number Nomenclature

The LUXEON IR ONYX has the following part number:

L11G-075010000000

Radiometric Power Maintenance

Please contact your local Sales Representative or Lumileds Technical Solutions Manager for more information about the long-term performance of this product.

Environmental Compliance

Lumileds LLC is committed to providing environmentally friendly products to the solid-state lighting market. LUXEON IR ONYX is compliant to the European Union directives on the restriction of hazardous substances in electronic equipment, namely the RoHS Directive 2011/65/EU and REACH Regulation (EC) 1907/2006. Lumileds LLC will not intentionally add the following restricted materials to its products: lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB) or polybrominated diphenyl ethers (PBDE).

Performance Characteristics

Product Selection Guide

LUXEON IR ONYX emitters are tested and binned with a 20ms monopulse of 350 mA at a junction temperature, T_j , of 25°C.

Table 1. Product performance and optical characteristics of LUXEON IR ONYX at 350 mA, $T_j=25^\circ\text{C}$.

WAVELENGTH [1] (nm)	TYPICAL FWHM BEAM ANGLE(°)	RADIOMETRIC POWER [2] 600-1050 nm (mW)		SPECTRAL FLUX 750-1000 nm ($\mu\text{W}/\text{nm}$)		PART NUMBER
		MINIMUM	TYPICAL	MINIMUM	TYPICAL	
600-1050	120	40	50	80	150	L1IG-0750100000000

Notes for Table 1

1. Lumileds maintains a tolerance of $\pm 2\text{nm}$ on peak wavelength measurements.
2. Lumileds maintains a tolerance of $\pm 7\%$ on radiometric power and spectral flux measurements.

Electrical and Thermal Characteristics

Table 2. Electrical and thermal characteristics for LUXEON IR ONYX at 350mA, $T_j=25^\circ\text{C}$.

PART NUMBER	FORWARD VOLTAGE (V_f)			TYPICAL TEMPERATURE COEFFICIENT OF FORWARD VOLTAGE [2] (mV/°C)	TYPICAL THERMAL RESISTANCE— JUNCTION TO SOLDER PAD (°C/W)
	MINIMUM	TYPICAL	MAXIMUM		
L1IG-0750100000000	3.0	3.20	3.4	-2.0 to -4.0	18

Notes for Table 2:

1. Lumileds maintains a tolerance of $\pm 1\%$ on forward voltage measurements.
2. Measured between 25°C and 85°C.

Absolute Maximum Ratings

Table 3. Absolute maximum ratings for LUXEON IR Broadband.

PARAMETER	MAXIMUM PERFORMANCE
DC Forward Current ^[1, 2]	500 mA
Peak Pulsed Forward Current ^[1, 3]	1000 mA
Emitter Junction Temperature ^[1] (DC & Pulse)	125°C
ESD Sensitivity (ANSI/ESDA/JEDEC JS-001-2012)	Class 2
Operating Case Temperature ^[1]	-40°C to 105°C
Emitter Storage Temperature	-40°C to 105°C
SMD Process Classification Temperature	260°C per JEDEC J-STD-020E
Allowable Reflow Cycles	3
Reverse Voltage ($V_{reverse}$)	7.0V (@<1μA)

Notes for Table 1

1. Proper current derating must be observed to maintain the junction temperature below the maximum allowable junction temperature.
2. Residual periodic variations due to power conversion from alternating current (AC) to direct current (DC), also called "ripple," are acceptable if the following conditions are met:
 - The frequency of the ripple current is 100Hz or higher
 - The average current for each cycle does not exceed the maximum allowable DC forward current
 - The maximum amplitude of the ripple does not exceed the maximum peak pulsed forward current

Characteristic Curves

Spectral Power Distribution Characteristics

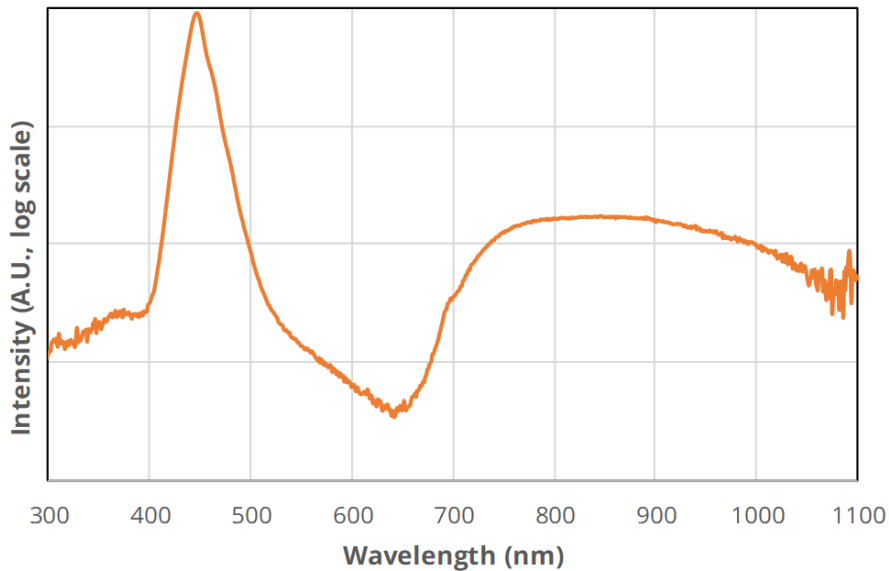


Figure 1. Typical normalized power vs. wavelength for LUXEON IR ONYX at 350mA, T_j=25°C.

Light Output Characteristics

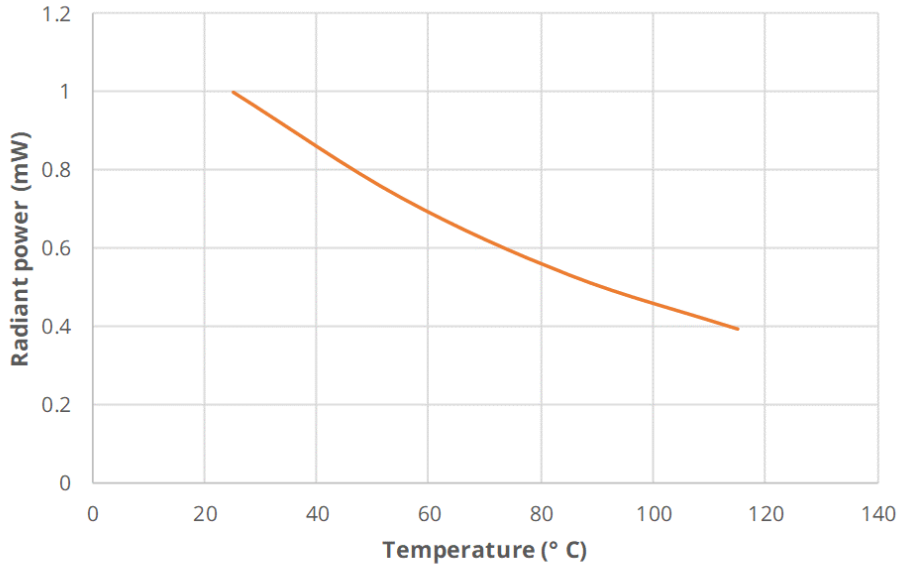


Figure 2. Typical normalized radiant power vs. case temperature for LUXEON IR ONYX at 350mA.

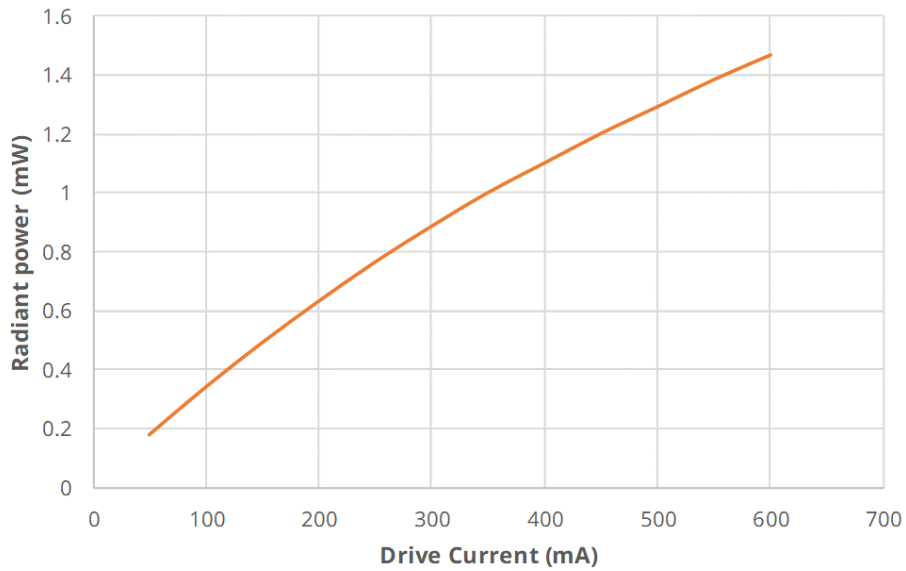


Figure 3. Typical normalized radiant power vs. forward current for LUXEON IR ONYX at $T_j=25^\circ\text{C}$.

Radiation Pattern Characteristics

T.B.D.

Figure 7. Typical radiation pattern for LUXEON IR ONYX at 350mA, $T_j=25^\circ\text{C}$.

T.B.D.

Figure 8. Typical polar radiation pattern for LUXEON IR ONYX at 350mA, $T_j=25^\circ\text{C}$.1

Product Bin and Labeling Definitions

Decoding Product Bin Labeling

In the manufacturing of semiconductor products, there are variations in performance around the average values given in the technical datasheet. For this reason, Lumileds bins components for luminous flux or radiometric power, color point, peak or dominant wavelength and forward voltage.

LUXEON IR ONYX emitters are labeled using a 2-digit alphanumeric CAT code following the format below:

A B

Where:

- A** – designates radiometric power bin (example: J=40 to 48mW, K=48 to 56mW)
- B** – designates forward voltage bin (example: D=3.0 to 3.1V, E=3.1 to 3.2V)

Therefore, a LUXEON IR ONYX emitter with a radiometric power range of 48 to 56 mW and a forward voltage range of 3.1 to 3.2V has the following CAT code:

KE

Radiometric Power Bins

Table 4 lists the standard radiometric power bins for LUXEON IR ONYX emitters. Although several bins are outlined, product availability in a particular bin varies by production run and by product performance. Not all bins are available in all proliferations.

Table 4. Radiometric power bin definitions for LUXEON IR ONYX at 350mA, T_j=25°C.

BIN	RADIOMETRIC POWER ^[1] (600-1050 nm, mW)	
	MINIMUM	MAXIMUM
J	40	48
K	48	56
L	56	64
M	64	72

Notes for Table 4.

1. Lumileds maintains a tolerance of ±7% on radiometric power measurements.

Forward Voltage Bins

Table 6. Forward voltage bin definitions for LUXEON IR ONYX at 350mA, T_j=25°C.


BIN	FORWARD VOLTAGE ^[1] (V _f)	
	MINIMUM	MAXIMUM
D	3.00	3.10
E	3.10	3.20
F	3.20	3.30
G	3.30	3.40

Notes for Table 6.

1.Lumileds maintains a tolerance of ±1% on forward voltage measurements.

PRELIMINARY

Mechanical Dimensions

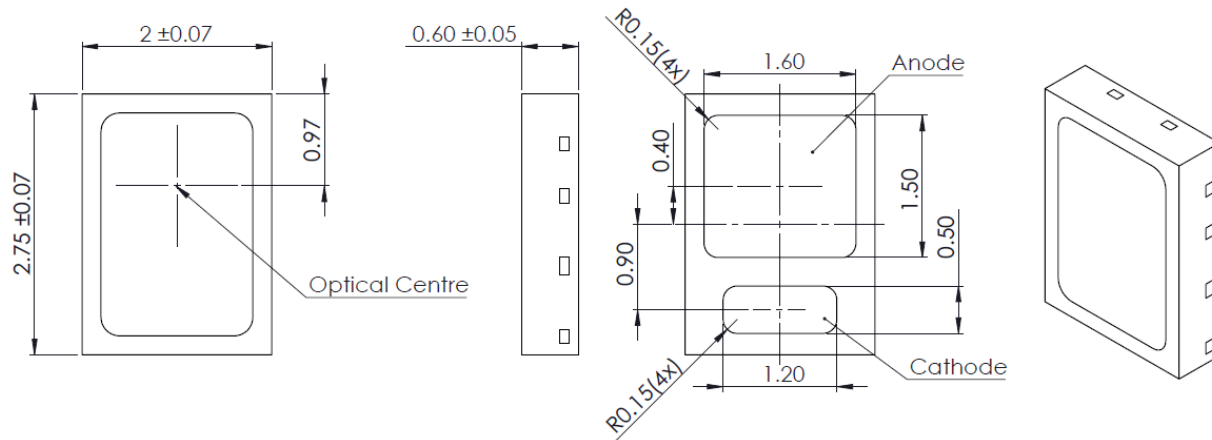

L1IG-075010000000

Figure 10: Mechanical Dimensions for LUXEON IR 2720 Broadband

Notes for Figure 10:

1. Drawings are not to scale.
2. All dimensions are in millimeters.

Reflow Soldering Guidelines

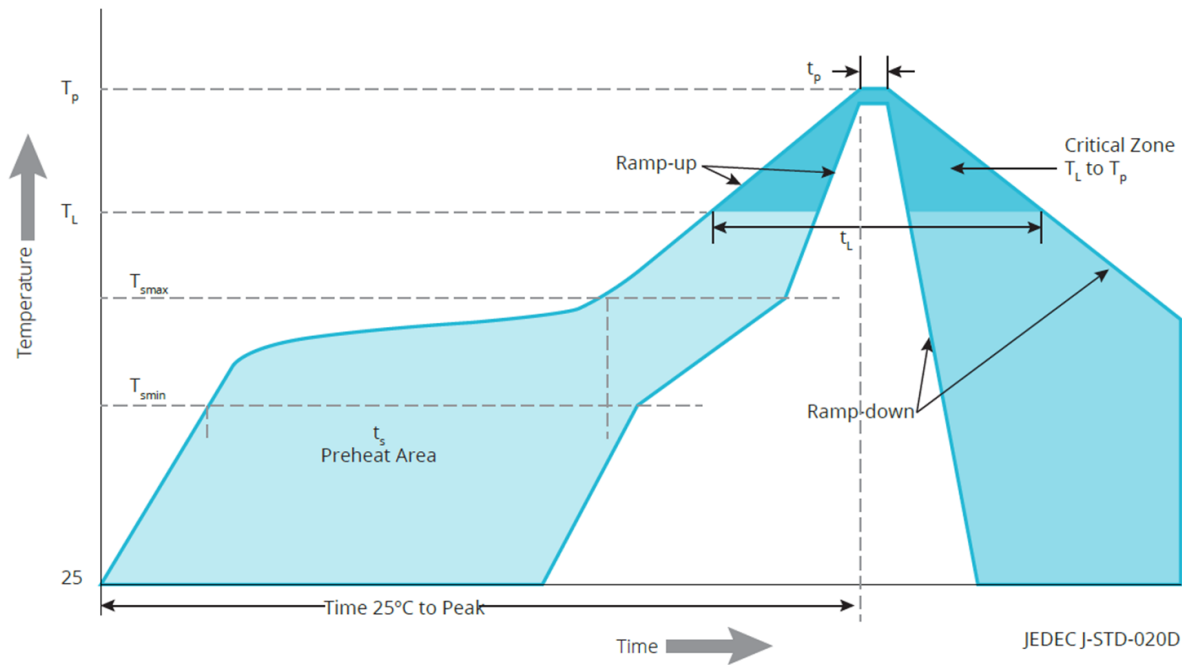


Table 7. Reflow profile characteristics for LUXEON IR 2720 Broadband.

PROFILE FEATURE	LEAD-FREE ASSEMBLY
PreHeat Minimum Temperature (T_{smin})	150°C
PreHeat Maximum Temperature (T_{smax})	200°C
PreHeat Time (t_{smin} to t_{smax})	120 seconds
Ramp-Up Rate (T_L to T_p)	3°C / second maximum
Liquidus Temperature (T_L)	217 °C
Time Maintained Above Temperature TL (t_L)	150 seconds
Peak / Classification Temperature (T_p)	260°C
Time Within 5°C of Actual Temperature (t_p)	10 to 30 seconds
Ramp-Down Rate (T_p to T_L)	6°C second maximum
Time 25°C to Peak Temperature	8 minutes maximum

JEDEC Moisture Sensitivity

Table 8. Moisture sensitivity levels for LUXEON IR 2720 Broadband.

LEVEL	LEAD-FREE ASSEMBLY		SOAK REQUIREMENTS STANDARD	
	TIME	CONDITIONS	TIME	CONDITIONS
1	Unlimited	≤30°C / 85% RH	168 Hours +5 / -0	85°C / 85% RH

Solder Pad Design

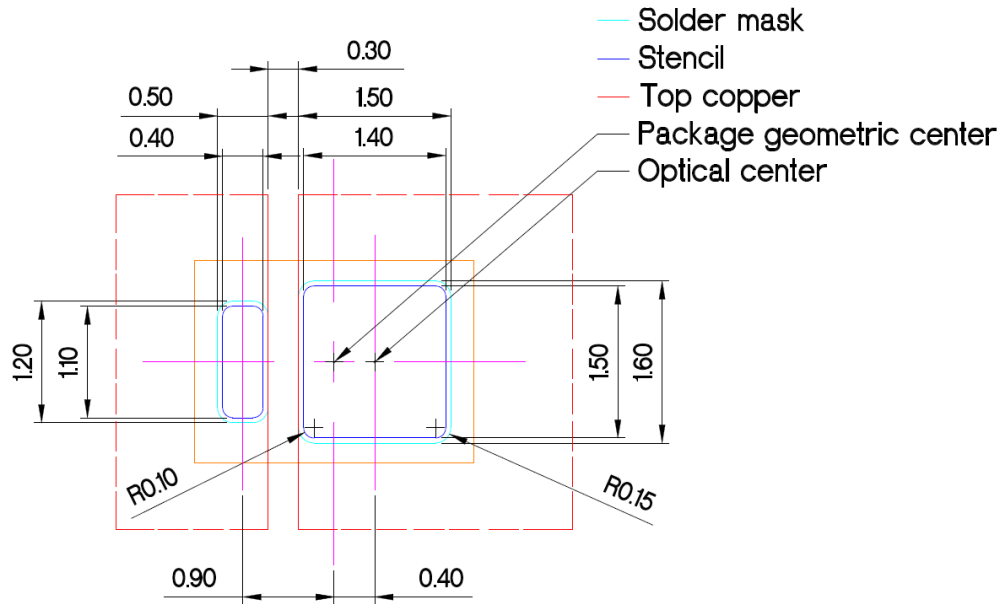


Figure 12. Recommended PCB solder pad layout for LUXEON IR 2720 Broadband.

Notes for Figure 12:

1. Drawings are not to scale.
2. All dimensions are in millimeters.

Packaging Information

Pocket Tape Dimensions

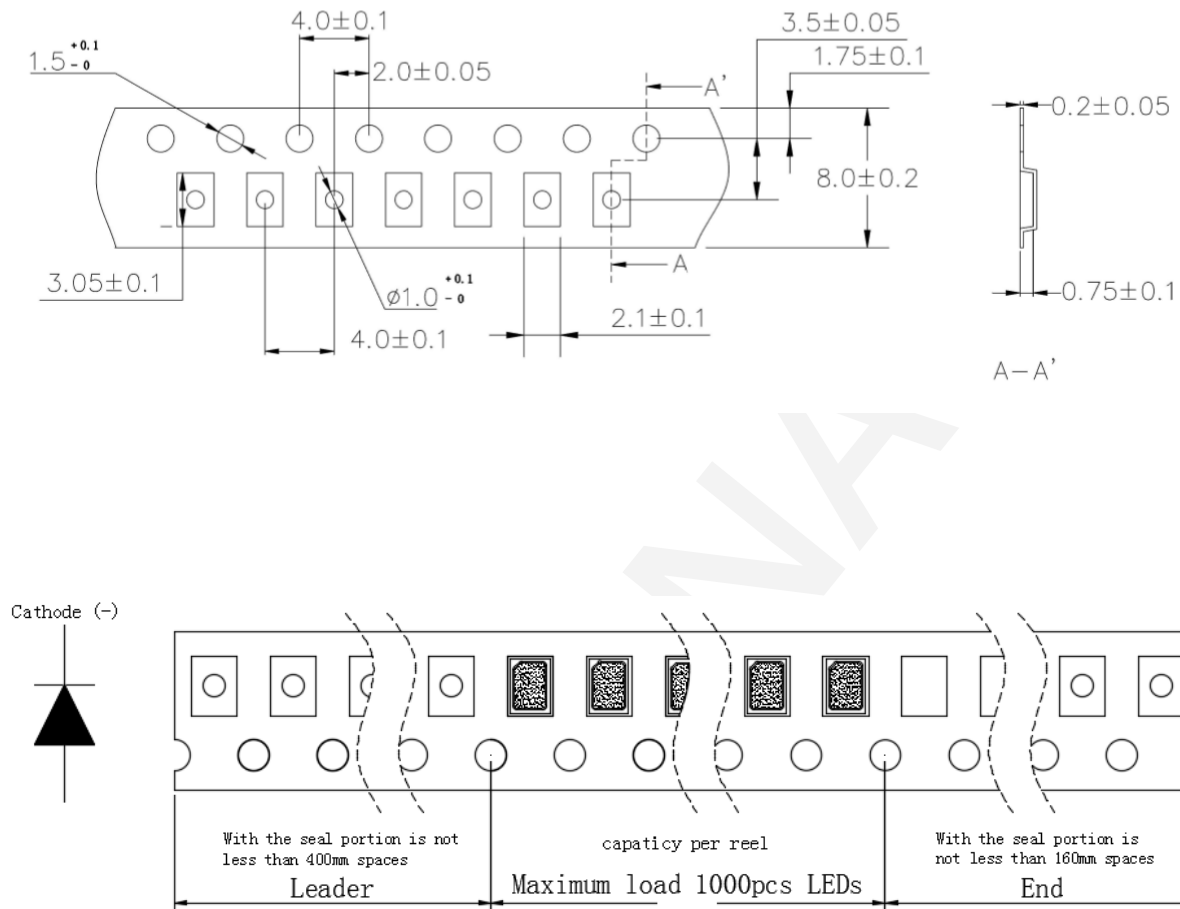


Figure 13. Pocket tape dimensions for L1IG-075010000000

Notes for Figure 13:

1. Drawings are not to scale.
2. All dimensions are in millimeters.

Reel Dimensions

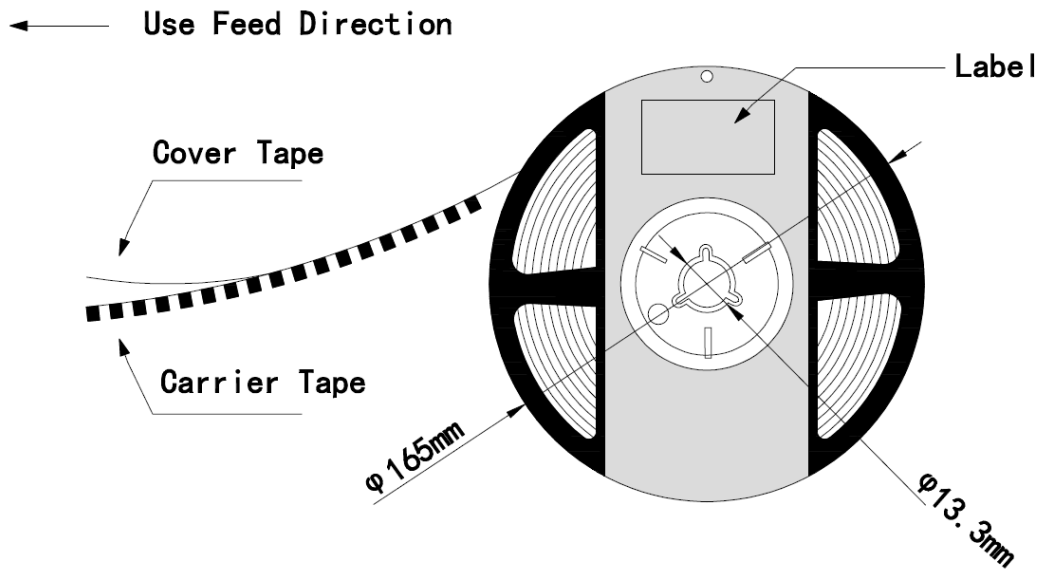


Figure 14. Reel dimensions for L1IG-0750100000000

Notes for Figure 14:

1. Drawings are not to scale.
2. All dimensions are in millimeters.

PRELIMINARY

About Lumileds

Companies developing automotive, mobile, IoT and illumination lighting applications need a partner who can collaborate with them to push the boundaries of light. With over 100 years of inventions and industry firsts, Lumileds is a global lighting solutions company that helps customers around the world deliver differentiated solutions to gain and maintain a competitive edge. As the inventor of Xenon technology, a pioneer in halogen lighting and the leader in high performance LEDs, Lumileds builds innovation, quality and reliability into its technology, products and every customer engagement. Together with its customers, Lumileds is making the world safer, better and more beautiful—with light.

To learn more about our lighting solutions, visit lumileds.com.



©2018 Lumileds Holding B.V. All rights reserved.
LUXEON is a registered trademark of the Lumileds Holding B.V. in the United States and other countries.

lumileds.com

Neither Lumileds Holding B.V. nor its affiliates shall be liable for any kind of loss of data or any other damages, direct, indirect or consequential, resulting from the use of the provided information and data. Although Lumileds Holding B.V. and/or its affiliates have attempted to provide the most accurate information and data, the materials and services information and data are provided "as is," and neither Lumileds Holding B.V. nor its affiliates warrants or guarantees the contents and correctness of the provided information and data. Lumileds Holding B.V. and its affiliates reserve the right to make changes without notice. You as user agree to this disclaimer and user agreement with the download or use of the provided materials, information and data. A listing of Lumileds product/patent coverage may be accessed at lumileds.com/patents.