
## **Datasheet**



MODEL NAME	ССТ	CODE
7hore 15 16	4000K	SL-Z7T4N90L9WW
Zhaga 15 16	5000K	SL-Z7R4N90L9WW


SAMSUNG ELECTRONICS CO., LTD. 1, Samsung-ro, Giheung-gu, Yongin-si, Gyeonggi-do 17113, KOREA

Version	Remark	Page	Date	Traced
1.0	The Preliminary Specification established.	ALL	20.04.28	I.S.LEE

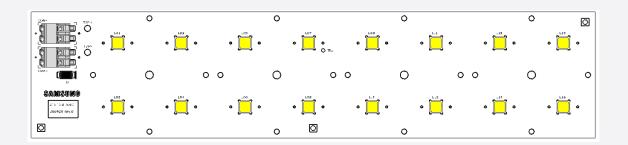

## **LED Module**

# Zhaga 15 16



## LH502C Module



#### **Table of Contents**

1.	Product Code Information	 1
2.	Characteristics	 2
3.	Appearance and Structure	 5
4.	Certification and Declaration	 6
5.	Label Structure	 7
6.	Packing Structure	 9
7.	Precautions in Handling & Use	 10
	Appendix	 11

### **1. Product Code Information**

#### - Zhaga 15 16 wih LH502C

CRI	ССТ	Product Code
CRI 70	4000K	SL-Z7T4N90L9WW
	5000K	SL-Z7R4N90L9WW

## 2. Characteristics (I<sub>F</sub> = 1050mA , $t_p = 60^{\circ}$ C)

#### a) Basic Information

Item	Unit	Rating	Remark
Rated Lifetime	Hour	>50,000	L70B50
Ingress Protection (IP)	-	no rating	
Ambient / Operating Temperature ( $t_a$ )	°C	-30 ~ +50	
Storage Temperature	٥C	-30 ~ +80	

#### Notes

 $\divideontimes \ I_F: \ Forward \ current \ or \ Operating \ current$ 

\*  $t_p$ : temperature at which performance is specified measured at "Tc point".

\* t<sub>a</sub>: ambient temperature

#### **b) Electro-Optical Characteristics**

Item		Unit		Rating		Remark
nem	nem		min	typ	max	Remark
Luminous Flux	4000K	Im	7,670	8,560	-	
	5000K		7,670	8,440	-	lf = 1050 mA
	4000K	Im/W		172.2		Tp = 60 °C
Luminous Efficacy	5000K		-	169.8	-	
ССТ	4000K	К		MacAdam 5 Step		Initial CCT
	5000K			MacAdam 7 Step		Integrating Sphere
Operating V	oltage	V	43.5	47.4	51.3	
Power Consu	Imption	W	-	49.7	-	
Color Rendering	Index (Ra)	-	70			
Operating C	urrent	mA		1,050	1,800	

#### Notes

\*\* Samsung maintains a measurement tolerance of Luminous flux ±7%, Ra ±3.0, Voltage ±5%, Current = ±5%, CCT = ±5%, CIE = ±0.005.

#### c) Light Distribution

Item	Unit	Nominal	Tolerance	Remark
Beam Angle (FWHM)	°(degree)	120	±5	

#### d) Temperature Characteristics

Item	Unit	Nominal* $(t_p)$	$Life^{**}(t_L)$	$Max^{***}(t_c)$
Temperature Case (Tc)	°C	60	100	120

Notes:

\* Temperature used to specify performance of the module  $(t_p)$ .

\*\* Rated maximum performance temperature at which lifetime is specified in L70B50 (t<sub>L</sub>).


\*\*\* Rated maximum temperature, highest permissible temperature to avoid safety risk (t<sub>c</sub>).

All temperatures are measured at the designated "Tc point" as indicated on the module.

Please use heat-sink(or heat dissipation solution) with proper thermal capacity(operating wattage).


#### f) Thermal Measurement

Performance temperatures are measured on "Tc point" as indicated on the module.

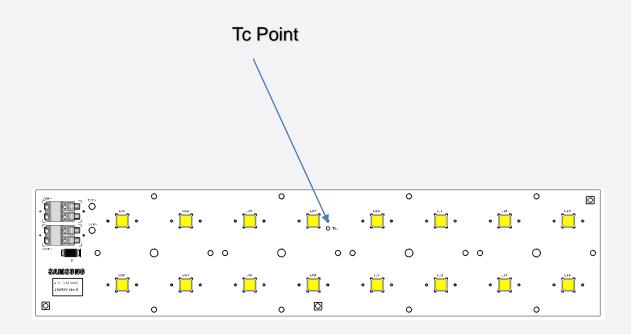

#### **3. Appearance and Structure**

#### a) Appearance and Dimension

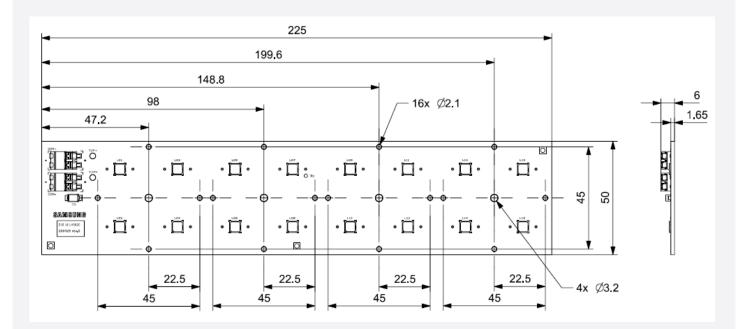

Item	Unit	Dimension	Tolerance
Module Size	mm	225 x 50.0	± 0.3
Module Height	mm	6.0	± 0.3
Module Weight	g	40.0	± 0.5

#### b) Structure

Item	Specification	
LED	LH502C	
Connector	WAGO 2060-452	
TVS DIODE	SMAJ100A	
PCB	MCPCB 1.65T, 1oz, 2Px8S	




## 4. Certification and Declaration

Item	Compliant to	Remark
Declaration	RoHS	Hazardous Substance & Material

#### 5. Label Structure

#### a) Module Label



Number	Item	Remark
(1)	Samsung Product Code	SL-Z7T4N90L9WW
2	SMT Date	YMDD
3	SMT Line No	1~E
4	Serial No	00001~99999
5	CCT	4000K
6	LED Maker	-S(Samsung)
Ø	Group No	-


#### b) Tray Label

- 100mm x 50mm



Number	Item	Remark
D	Model Code	Refer to page 1
2	LOT ID	
3	Quantity	90
4	Date of production	
5	Date of Issue	

#### c) Box Labels

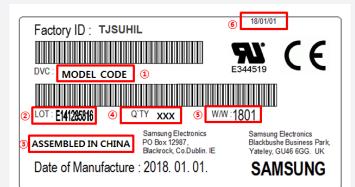

Number	Item	Remark
(1)	Model Number (Product Code)	Refer to page 1
2	Lot No.	-
3	Country of Origin	China
(4)	Packing Quantity	90
(5)	Production Date (year & week)	-
6	Production Date (year/month/date)	-

## 6. Packing Structure

Product	Packing	Quantity (ea)	Weight (kg)	Remark
	Tray	30	5.8	Weight
SL-Z7T4N90L7WW SL-Z7R4N90L7WW	Box	90	5.0	(includes Modules, Trays and a Box)
	Pallet	4050	261	

#### 7. Precautions in Handling & Use

- This LED Module should not be used in any type of fluid such as water, oil, organic solvent, etc. When washing is required, IPA is
  recommended to use. When using other solvents it should be confirmed beforehand whether the solvents may react with the Module
  material. The banned Freon solvents should not be used. Do not clean using ultrasonic cleaner.
- 2) The LEDs are sensitive to the static electricity and surge. It is recommended to use a wrist band or anti-electrostatic glove when handling the LED Modules. If voltage exceeding the absolute maximum rating is applied to LEDs, it may cause damage or even destruction to LED devices. Damaged LEDs may show some unusual characteristics such as increase in leak current, lowered turn-on voltage, or abnormal lighting of LEDs at low current.
- 3) VOCs (Volatile Organic Compounds) can be generated from adhesives, flux, hardener or organic additives used in luminaires (fixtures). Transparent LED silicone encapsulant is permeable to those chemicals and they may lead a discoloration of encapsulant when they exposed to heat or light. This phenomenon can cause a significant loss of light emitted (output) from the luminaires (fixtures). In order to prevent these problems, we recommend users to know the physical properties of the materials used in luminaires, and they must be selected carefully.
- 4) Risk of sulfurization (or tarnishing)

The LED uses a silver-plated lead frame and its surface color may change to black (or dark colored) when it is exposed to sulfur (S), chlorine (Cl) or other halogen compound. Sulfurization of lead frame may cause intensity degradation, change of chromaticity coordinates and, in extreme cases, open circuit. It requires caution. Due to possible sulfurization of lead frame, the LED Modules should not be used and stored together with oxidizing substances made of materials such as rubber, plain paper, lead solder cream, etc.

- 5) The resin area is very sensitive, please do not handle, press, touch or rub it.
- 6) Do not drop the Module or give shocks.
- 7) Do not store the Module in a dusty place or humid location.
- 8) Do not disassemble the Module.
- 9) Do not directly look into the lighted LED with naked eyes for a long period of time.
- 10) Please consider the creepage and clearance distance at the end product.

## Appendixl. Forward Current Characteristics

Item	Unit	Forward Current	ССТ	typ. Rating
	lm	350mA	4000K	3,105
			5000K	3,060
Luminous Flux		700mA	4000K	5,975
Luminous Flux			5000K	5,890
		1400mA	4000K	10,900
			5000K	10,745
	V	350mA	4000K	44.0
			5000K	
Operating Voltage		700mA	4000K	45.8
Operating voltage			5000K	
		1400mA	4000K	48.9
			5000K	
	Im/W	350mA	4000K	201.8
Luminous Efficacy			5000K	198.9
		700mA	4000K	186.6
			5000K	184.0
		1400mA	4000K	159.4
			5000K	157.1

11

#### About Samsung Electronics Co., Ltd.

Samsung inspires the world and shapes the future with transformative ideas and technologies. The company is redefining the worlds of TVs, smartphones, wearable devices, tablets, digital appliances, network systems, and semiconductor and LED solutions. For the latest news, please visit the Samsung Newsroom at <u>news.samsung.com</u>

Copyright © 2018 Samsung Electronics Co., Ltd. All rights reserved. Samsung Electronics reserves the right to modify, at its sole discretion, the design, packaging, specifications, and features shown herein without notice at any time.

Samsung Electronics Co., Ltd. 1, Samsung-ro, Giheung-gu, Yongin-si, Gyeonggi-do, 17113 KOREA www.samsung.com/led/